



NEXEN

NEXEN TIRE

PRODUCT SHOWCASE

2026



AIXV Technology



EV COMPATIBLE

NEXEN

"As a company that has the ability to impress customers with the best quality, we will become something that you can have utmost pride in. We will emerge as the NEXEN TIRE that makes you elated with new products and breakthroughs in technology development. We will move forward to becoming a global leader, looking ahead to the next century. And beyond history, and beyond passion, in the name of trust, we will stand by you as you advance into the future."

Travis Kang - CEO, Nexen Tire

**SINCE 2000,
Nexen Tire has produced over**

600,000,000

**(over 1/2 billion) tires with absolutely
ZERO recalls in the USA.**







ULTRA HIGH PERFORMANCE FOR BEST SPORT DRIVING

The N'Fera Sport—engineered for drivers who demand the ultimate in ultra-high performance. Designed to elevate your sport driving experience, the N'Fera Sport delivers outstanding wet performance, improved braking capabilities, and enhanced handling, ensuring precision and control in every turn. Whether you're navigating tight corners or pushing the limits on open roads, this tire provides the grip, stability, and responsiveness you need to stay ahead of the competition.


OUTSTANDING WET PERFORMANCE

Improved water drainage performance by optimizing four-channel-groove design using digital simulation technology.

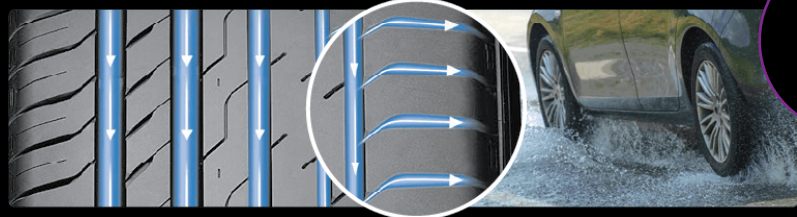

IMPROVED BRAKING PERFORMANCE

SLANT SHOULDER BLOCK DESIGN
Improved braking performance by reinforcing shoulder block hardness.



Slant Shoulder Block

ENHANCED HANDLING PERFORMANCE

Upgraded tire profile using finite analysis technology to reinforce handling, braking performance, and durability.




Profile Simulations



N'FERA Sport



Conventional



N'FERA Sport




PATTERN DESIGN & CONSTRUCTION



WIDE LONGITUDINAL GROOVE

Improved drainage performance.



RIGID CENTER BLOCK

Improved control response & strengthened stability.

JOINTLESS BEAD WIRE & HIGH-HARDNESS BEAD FILLER

Reinforced grip of tire and wheel to improve handling performance.

OPTIMUM CARCASS PROFILE

Optimally designed carcass profile that minimizes tire deflection, improving driving stability.



WIDE OUTSIDE BLOCK DESIGN

Excellent dry & wet handling performance at high speed.



OUTSIDE GROOVE WALL DESIGN

High-speed cornering & grip-handling performance.

HIGH-TENSILE STEEL BELT

Optimizes grip pressure and stress dispersion to enhance braking function with OBCS Technology.

OPTIMUM SIDEWALL

Effectively absorbs impact on various types of surfaces, providing a more comfortable driving experience.



NORTH AMERICAN OE FITMENTS

Porsche Panamera/Cayenne | Mini Cooper
Audi A6/A7/Q3 | BMW iX/X3/X4

RED DOT DESIGN AWARD

The Red Dot is the distinction for high design quality. Only products that demonstrate outstanding design are awarded the coveted seal of quality by an international jury.



N'PRIZ S

GRAND TOURING ALL-SEASON


DESIGNED FOR TODAY'S ROADS. BUILT FOR TOMORROW'S VEHICLES.

The N'Priz S is built for passenger Sedans and EVs, delivering consistent performance across every drive. Its advanced design maximizes tread life, reduces noise, and enhances ride comfort — giving drivers a smooth, quiet, and reliable ride from start to finish.

AI x VI Technology

Our AI x VI system combines AI (Performance Prediction) and VR (Virtual Driving Simulation) to engineer tires for both EVs and gas-powered vehicles.

AI analyzes noise patterns and road surfaces, while VR tests virtual prototypes to refine tread shapes for a quieter ride, better handling, and reliable braking. Paired with our 4D rubber compound for longer tread life and improved efficiency, the N'Priz S delivers a smooth, confident drive in any season.

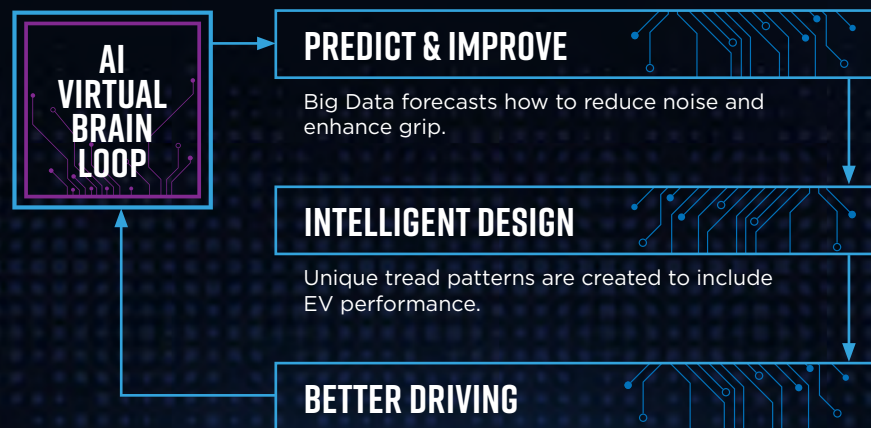

DESIGNED FOR ALL VEHICLE TYPES - ICE, HYBRID, PHEV, AND EVs

The reinforced center block and increased footprint deliver high torque smoothly to the road, while our advanced compound boosts wear resistance.

REDUCED ROAD NOISE

Utilizing AI x VI Technology, variable-pitch shoulder blocks reduce pattern noise by 4% from previous model.

SUPERIOR ALL-SEASON TRACTION


In cold conditions, standard synthetic rubber becomes less flexible, resulting in a considerable decline in overall performance. From heat to cold, Nexen's **4D compound technology** ensures driving stability in every season.

3D SIPE TECHNOLOGY

Interlocking shapes and biting edges on the tread blocks maintain rigidity for better braking and handling on snow and icy roads.

PROVEN TRACTION AND LONGER LASTING

2.5% wider contact patch enhances mileage, braking, and handling performance.

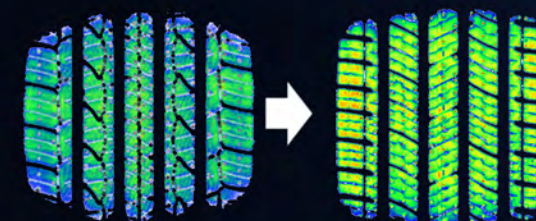

*60,000 mile tread warranty for EVs.




EV COMPATIBLE

4D COMPOUND TECHNOLOGY

Through the use of an optimized rubber compound, it provides enhanced grip as well as energy efficiency and mileage performance, providing a tire life that is both safe and satisfying.

4D DURABILITY COMPOUND APPLICATION

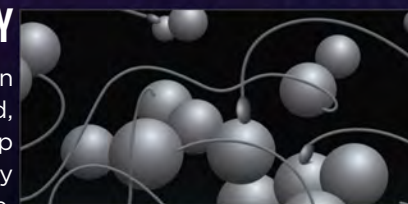

CONVENTIONAL COMPOUND


4D COMPOUND —
EVENLY DISTRIBUTED



STEADY DRIVING PERFORMANCE
IN VARIOUS CONDITIONS


IMPROVED BRAKING ON ANY
TYPE OF ROAD CONDITION

Optimized compound hardness and grip resin technology improves braking performance by increasing road contact area.

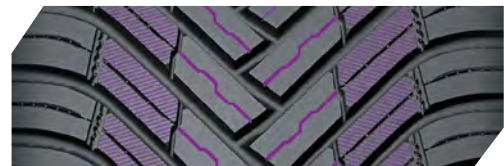


ENHANCED GRIP & SLIP-RESISTANT
ON WET AND SNOWY ROADS

Angled wave shape and micro-thin kerfs deliver outstanding wet and snow performances.

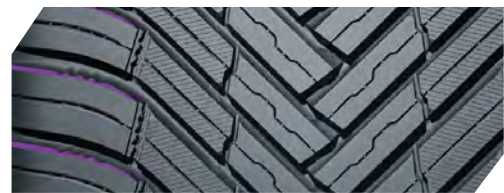

REINFORCED SNOW TRACTION

Jagged patterns on both shoulder blocks effectively generate tractive force on snowy road conditions.



3PMSF CERTIFIED

3PMSF Certified is a severe winter certification to withstand heavy snow, ice, and tough terrain.

COVERAGE FOR PEACE OF MIND

The N'Blue 4 Season 2 is backed by one of the most comprehensive warranties in the industry, delivering extended value and peace of mind throughout the life of the tire.



70K MILE
TREAD WARRANTY



ROAD HAZARD
PROTECTION*
FIRST 2/32"
OR 1 YEAR



36 MONTHS
ROADSIDE
ASSISTANCE



FREE TRIAL
60 DAYS OR
1,000 MILES



reddot winner 2022



ALL WEATHER TOURING

N'BLUE 4Season2

EXCEPTIONAL
ALL-WEATHER
PERFORMANCE






HIGHWAY TERRAIN
**ROADIAN
HTX2**

**ALL PERFORMANCE
IN ALL WEATHER**



**LONG MILEAGE PERFORMANCE
DESIGNED INTO EVERY FEATURE.**




**HIGH-SPEED
CONTROL**

Cooling pins applied to shoulder of the tire to efficiently dissipate heat for increased durability under high speeds.



New Roadian HTX2



Conventional



**REINFORCED
SNOW TRACTION**

Emerging 3D sipes improve traction in snowy conditions. Changing sipe technology as tire wears provides increased tread contact and overall handling characteristics.

INCREDIBLE DURABILITY

Nexen's proven bead design and construction consists of an optimized profile bead filler and stiffer rim flange for increased overall rigidity and tire durability.

THEY LOOK AS GOOD AS THEY PERFORM.

The Roadian HTX2 is available in two sidewall design options to complement your vehicle and white lettering in limited sizes.



3PMSF Certified

3PMSF Certified is a severe winter certification to withstand heavy snow, ice, and tough terrain. (except OE tires)



ALL TERRAIN

ROADIAN ATX

PUSHING ALL-TERRAIN PERFORMANCE

TO A NEW LEVEL



XTRA TOUGH

Nexen's XTra Tough Technology produces an industry-best AT tire with longer life and increased durability that performs under heavier loads and higher pressures. The increased sidewall rigidity enhances stability while cornering under loads and heavy towing.

ENHANCED DURABILITY AND PERFORMANCE

The sidewall design increases puncture resistance both on road and off. Durability is also improved thanks to an aggressive angled pattern.



REINFORCED SNOW TRACTION

Emerging 3D sipes improve traction in snow, mud, and wet conditions. Nexen's changing sipe technology increases tread-to-road contact and overall handling characteristics as the tire wears.

PICK THE SIDEWALL THAT FITS YOU BEST.

The Roadian ATX is available in two dynamic sidewall design options to complement your vehicle and attitude. The dual-side wall design is more aggressive than the AT Pro predecessor without sacrificing a quiet ride.



3PMSF Certified

as a severe winter certification to withstand heavy snow, ice, and tough terrain. (Except OE & flotation sizes)



DEALER RESOURCES



NEXEN NEXT LEVEL DEALER PROGRAM

Easy to understand, Fast payouts,
Dealer Dashboards, Distributor Dashboards,
What if? Calculator, Annual True-up,
Combine Locations, and much more!



NEXEN NETWORK

CUSTOMIZED IN-STORE TV ENTERTAINMENT

Showcase store promotions, Nexen products, and engaging viral content. Plus live TV and sports!

FINALLY A PROGRAM FOR SPECIALTY SHOPS AND DEALERS!

- Tire Payouts
- Premium Wearables
- And More!

OFF-ROAD GARAGE



NEXENACE

ACCELERATED CERTIFICATION & EDUCATION

ONLINE TIRE TRAINING AND EDUCATION

- Earn points
- Enter sweepstakes
- Order merchandise
- Request POP materials



[NEXENACE.COM](https://n Xenace.com)

[NEXENTIREGARAGE.COM](https://Nexentiregarage.com)



Next Level
NexenACE
Nexen Network
Dealer Portal
Tire Finder
Brand Resources



ULTRA HIGH PERFORMANCE



NEW

N'FERA Sport

PREMIUM ULTRA HIGH PERFORMANCE SUMMER

Designed to elevate your sport driving experience, the N'Fera Sport delivers outstanding wet performance, improved braking capabilities, and enhanced handling, ensuring precision and control in every turn.

SIZES AVAILABLE: 61
SIZE RANGE: 17" - 21"

MILEAGE WARRANTY: 30,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 90 days or within 2/32"

UTQG: 280 AA A
SPEED RATING: Y & (Y)



21

EV COMPATIBLE

OE FITMENT





N'FERA Sport R

EXTREME ULTRA HIGH PERFORMANCE

The Nexen N'Fera Sport R has that same level of intensity designed deep into its DNA. Grip. Control. Cornering. Speed and feedback... Amazing.

SIZES AVAILABLE: 13
SIZE RANGE: 15" - 19"

MILEAGE WARRANTY: N/A
ROAD HAZARD: N/A
ROADSIDE ASSISTANCE: 36 months

UTQG: 200 A A
SPEED RATING: W

20



N'FERA AU7

ULTRA HIGH PERFORMANCE ALL SEASON

Designed for the discretionary driver of sports cars, luxury coupes, and performance sedans looking for superior traction in dry and wet conditions.

SIZES AVAILABLE: 46
SIZE RANGE: 16" - 20"

MILEAGE WARRANTY: 50,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles

UTQG: 500 AA A / 500 A A / 560 A A
SPEED RATING: H, V, W, & Y



25

OE FITMENT



PASSENGER TOURING



NEW

N'PRIZ S

GRAND TOURING ALL SEASON

The N'Priz S is designed for all vehicle types—including ICE, hybrid, PHEV, and EV—delivering consistent performance on every drive.

SIZES AVAILABLE: 48
SIZE RANGE: 15" - 20"

UTQG: 700 A A
SPEED RATING: H, V, & W

MILEAGE WARRANTY: 80,000 miles | 60,000 for EVs
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles



29

EV COMPATIBLE

AI x V Technology

OE FITMENT





N5000 Platinum

GRAND TOURING ALL SEASON

The upgraded Nexen N5000 Platinum combines the look of a performance tire with the comfortable, quiet ride of a passenger tire. Branded with the M+S symbol, this tire provides year-round traction, even in light snow.

SIZES AVAILABLE: 69
SIZE RANGE: 16" - 22"

MILEAGE WARRANTY: 70K(H, V)/55K(W) miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles

UTQG: 580 A A (W), 700 A A (H, V)
SPEED RATING: H, V, W, & Y

33



N'PRIZ AH5

STANDARD TOURING ALL SEASON

The perfect tire for entry-level sedans, CUVs, and SUVs. This tire offers a great balance of performance, handling, comfort, and wear life at a value price.

SIZES AVAILABLE: 70
SIZE RANGE: 14" - 20"

MILEAGE WARRANTY: 65,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months

UTQG: 460/500 A A
SPEED RATING: S, T, H, & V

37

PASSENGER TOURING (CONT.)



N'BLUE 4Season2

ALL-WEATHER TOURING

The N'BLUE 4 Season 2 is Nexen Tire's most recent all-weather tire designed for various on-road conditions. It not only improves snow performance, but also adds stability to high-speed driving with an all-weather optimized pattern design. In addition, this tire claims to have a longer treadlife.

SIZES AVAILABLE: 60
SIZE RANGE: 15" - 21"

UTQG: 600 A A
SPEED RATING: H, V, W & Y

MILEAGE WARRANTY: 70,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles



27

3 Peak Mountain Snowflake Certified

CUV / SUV / LIGHT TRUCK



ROADIAN ATX

ALL TERRAIN

Designed for durability and all-around grip performance at any road condition with heavy-duty construction and materials.

SIZES AVAILABLE: 88
SIZE RANGE: 15" - 22"

UTQG: 560/600 A B (P) Metric
SPEED RATING: Q, S, T, H, & V

MILEAGE WARRANTY (P): 70,000 miles
MILEAGE WARRANTY (LT): 60,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles



45

OE FITMENT

Jeep

3 Peak Mountain Snowflake Certified



ROADIAN HTX2

HIGHWAY TERRAIN

Designed for the long-inspired journey to create a high-mileage SUV and Light Truck tire that also delivers outstanding all-weather driving performance.

SIZES AVAILABLE: 54
SIZE RANGE: 16" - 22"

UTQG: 700 A A/B (P) Metric
SPEED RATING: R, S, T, & H

MILEAGE WARRANTY (P): 70,000 miles
MILEAGE WARRANTY (LT): 50,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles



43

OE FITMENT

Jeep

3 Peak Mountain Snowflake Certified



ROADIAN HP

STREET SPORT TRUCK ALL SEASON

A low-profile truck and SUV tire that delivers sporty performance on any road surface.

SIZES AVAILABLE: 22
SIZE RANGE: 17" - 24"

MILEAGE WARRANTY: 40,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months

UTQG: 460 A A
SPEED RATING: H & V

40



ROADIAN GTX

CUV/SUV TOURING

Drivers can count on the versatility and dependability of the New Roadian GTX, from cross-country road trips to trips to the store.

SIZES AVAILABLE: 70
SIZE RANGE: 16" - 22"

MILEAGE WARRANTY: 70,000 miles
ROAD HAZARD: First 2/32" or 1 year
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles

UTQG: 540/600/680 A A
SPEED RATING: H, V, & W



41

OE FITMENT





ROADIAN MTX

MUD TERRAIN

The Roadian MTX features an aggressive design that is extremely versatile for on- and off-road driving. Each tire boasts a dual-sidewall design that allows you to customize the look of the tire on your vehicle.

SIZES AVAILABLE: 36
SIZE RANGE: 15" - 22"

MILEAGE WARRANTY: N/A
ROAD HAZARD: N/A
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles

SPEED RATING: Q

48



ROADIAN CT8 HL

COMMERCIAL VAN/LT

A tire constructed to deliver heavy-duty performance for commercial vehicles.

SIZES AVAILABLE: 14
SIZE RANGE: 15" - 18"

MILEAGE WARRANTY: N/A
ROAD HAZARD: N/A
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 60 days or 1,000 miles


SPEED RATING: R, S, & T



51

OE FITMENT



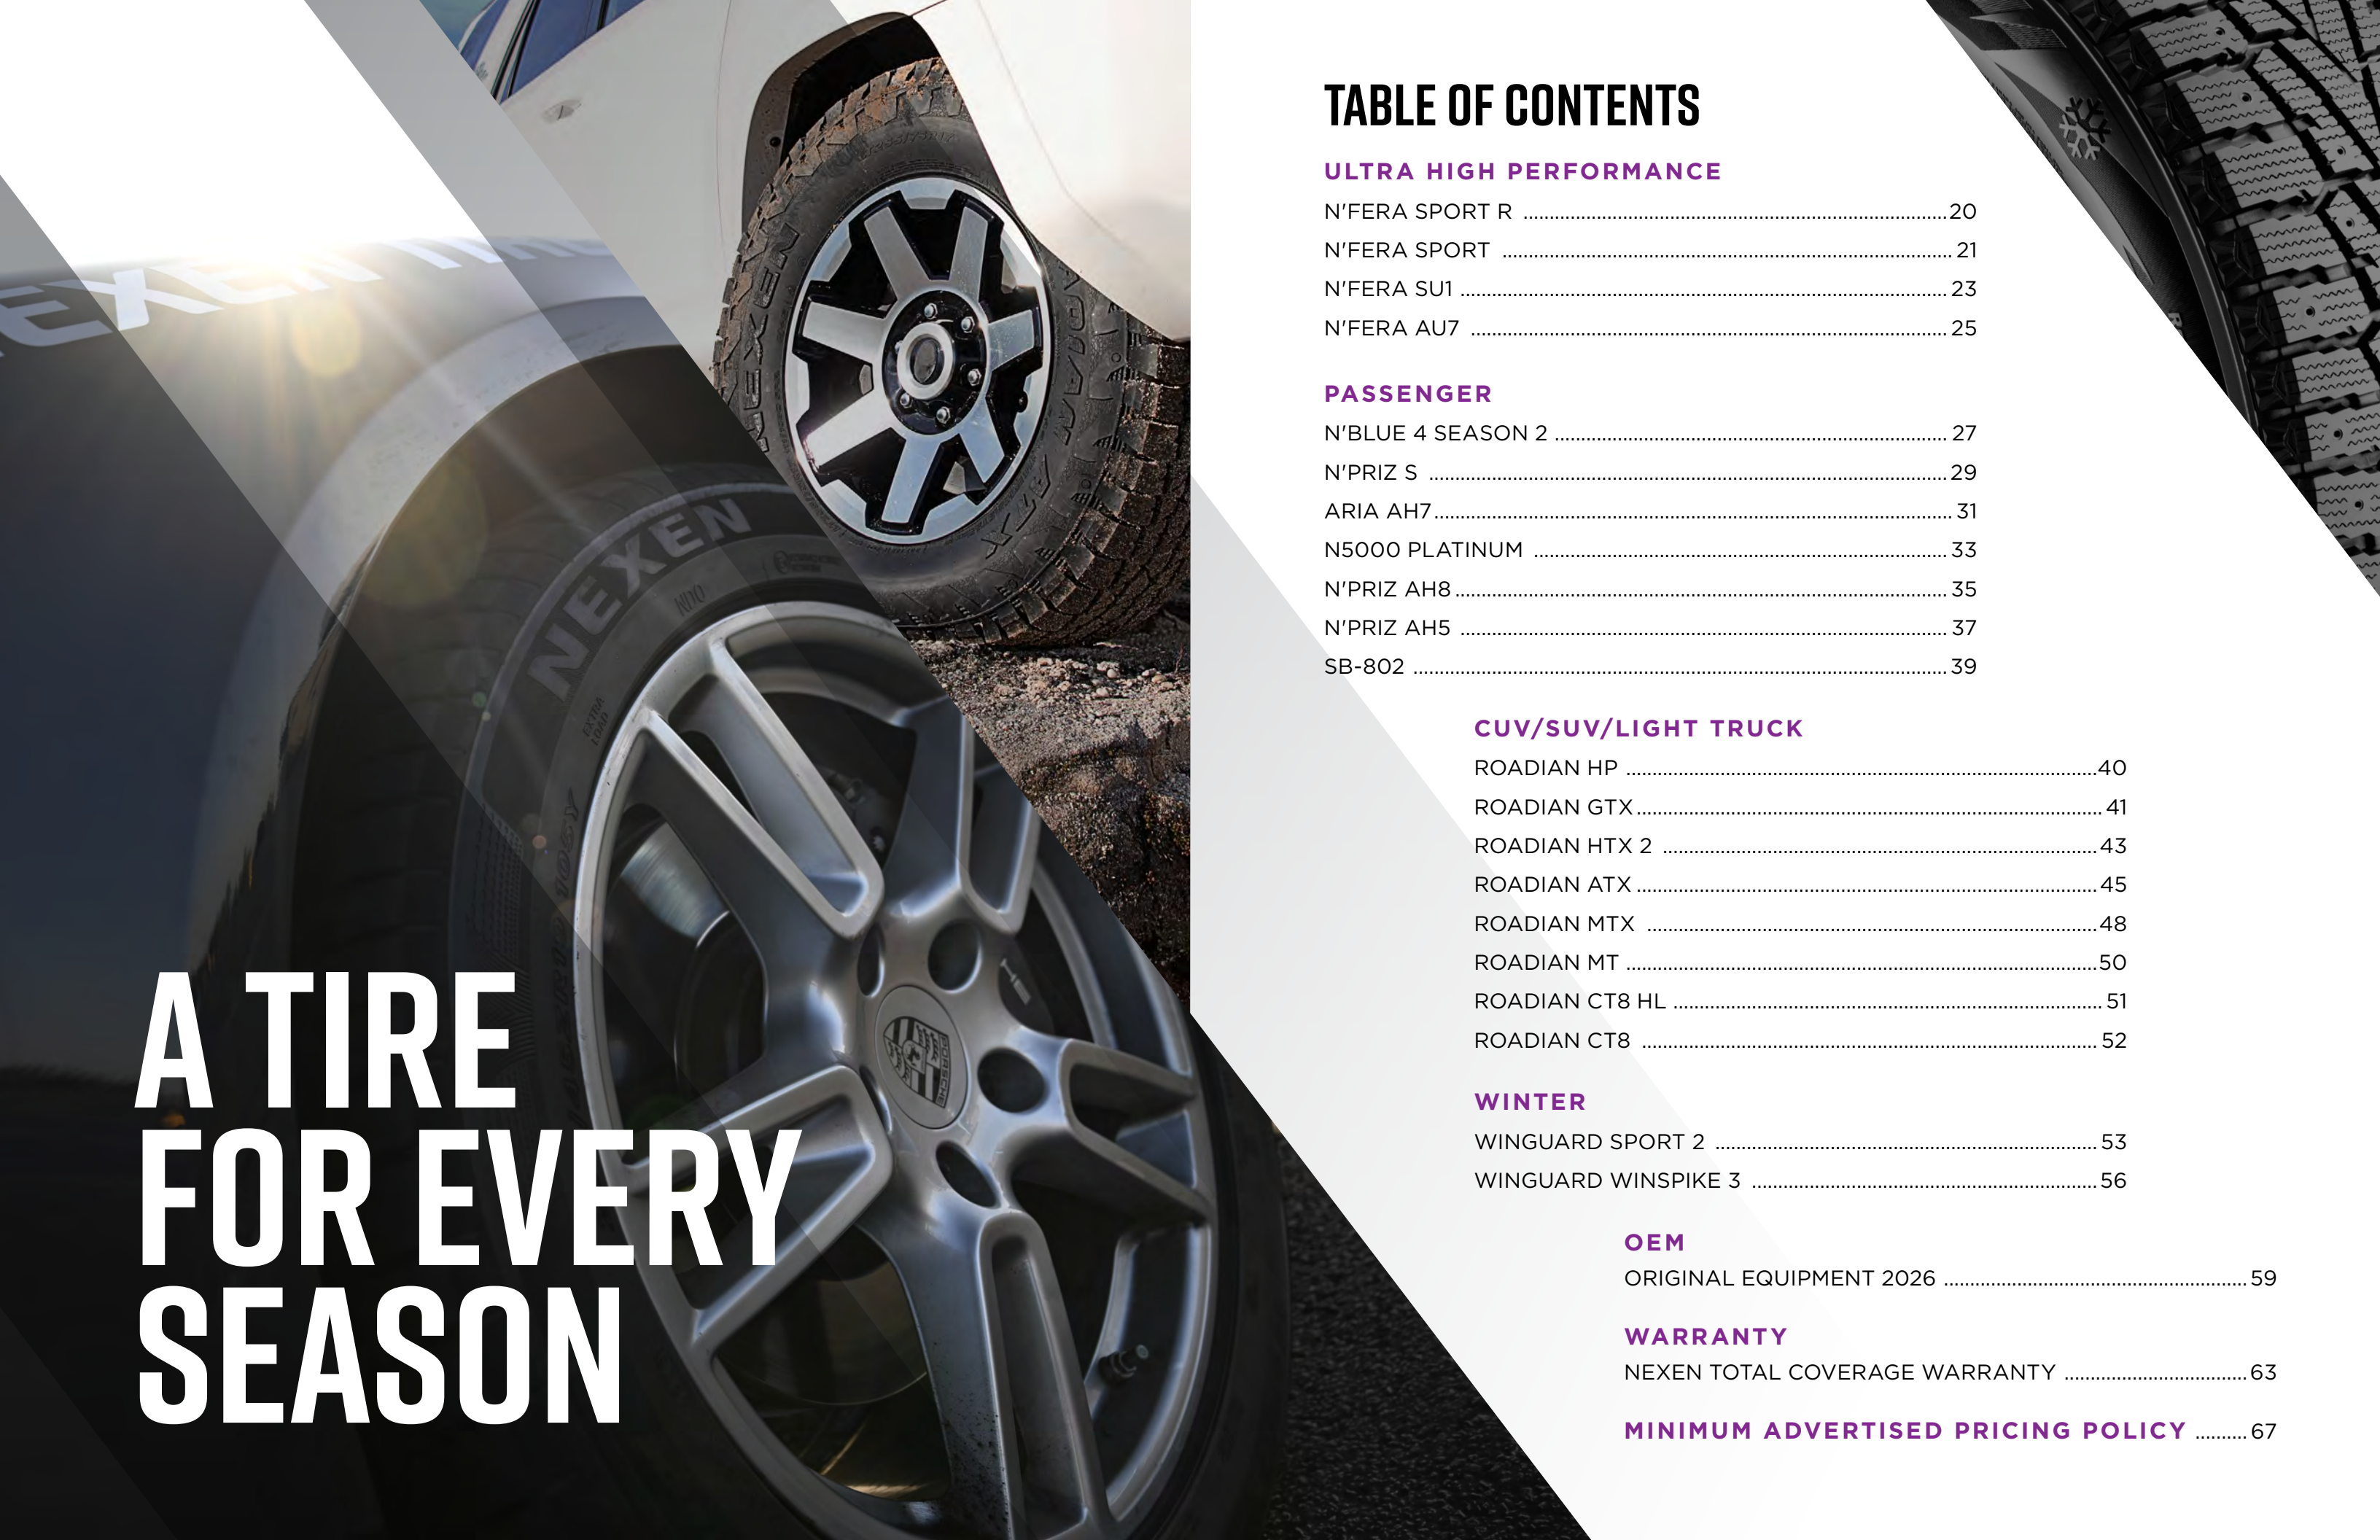

A TIRE FOR EVERY SEASON

TABLE OF CONTENTS

ULTRA HIGH PERFORMANCE

N'FERA SPORT R	20
N'FERA SPORT	21
N'FERA SU1	23
N'FERA AU7	25

PASSENGER

N'BLUE 4 SEASON 2	27
N'PRIZ S	29
ARIA AH7	31
N5000 PLATINUM	33
N'PRIZ AH8	35
N'PRIZ AH5	37
SB-802	39

CUV/SUV/LIGHT TRUCK

ROADIAN HP	40
ROADIAN GTX	41
ROADIAN HTX 2	43
ROADIAN ATX	45
ROADIAN MTX	48
ROADIAN MT	50
ROADIAN CT8 HL	51
ROADIAN CT8	52

WINTER

WINGUARD SPORT 2	53
WINGUARD WINSPIKE 3	56

OEM

ORIGINAL EQUIPMENT 2026	59
-------------------------------	----

WARRANTY

NEXEN TOTAL COVERAGE WARRANTY	63
-------------------------------------	----

MINIMUM ADVERTISED PRICING POLICY	67
---	----

N'FERA Sport R

EXTREME ULTRA HIGH PERFORMANCE

The Nexen N'Fera Sport R has that same level of intensity designed deep into its DNA. Grip. Control. Cornering. Speed and feedback... Amazing. The N'Fera Sport R lets you ring out every last cubic inch of your car's capability with the confidence to enter that corner just a little bit later... and exit a lot more happy.



36 MONTHS

Product	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
10224NXX		205/50R15	XL	89	W	4	50	1,279	-	6.5	5.5-7.5	8.2	23.1	7.5	200	A	A	Black
10251NXX		225/45R15		87	W	4	51	1,201	-	7.5	7.0-8.5	8.9	23.0	7.5	200	A	A	Black
10223NXX		245/40R15		88	W	4	51	1,235	-	8.5	8.0-9.5	9.8	22.7	7.5	200	A	A	Black
10211NXX		225/45R17	XL	94	W	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	7.5	200	A	A	Black
10227NXX		245/40R17	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.8	24.7	7.5	200	A	A	Black
10210NXX		255/40R17	XL	98	W	4	50	1,653	-	9.0	8.5-10.0	10.2	25.0	7.5	200	A	A	Black
18120NXX		245/40R18		93	W	4	51	1,433	-	8.5	8.0-9.5	9.8	25.7	7.5	200	A	A	Black
10244NXX		255/35R18	XL	94	W	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	7.5	200	A	A	Black
10213NXX		265/35R18	XL	97	W	4	50	1,609	-	9.5	9.0-10.5	10.7	25.3	7.5	200	A	A	Black
10203NXX		275/35R18		95	W	4	51	1,521	-	9.5	9.0-11.0	10.9	25.6	7.5	200	A	A	Black
10212NXX		295/40R18		103	W	4	51	1,929	-	10.5	10.0-11.5	11.9	27.3	7.5	200	A	A	Black
10199NXX		315/30R18		98	W	4	51	1,653	-	11.0	10.5-11.5	12.6	25.5	7.5	200	A	A	Black
10225NXX		305/30R19	XL	102	W	4	50	1,874	-	11.0	10.5-11.5	12.3	26.3	7.5	200	A	A	Black

Technical data can be changed without further notice.

PERFORMANCE RATINGS



BRAKING
10



COMFORT
5



FUEL EFFICIENCY
5



HANDLING
10



WEAR LIFE
4

N'FERA Sport

NEW

PREMIUM ULTRA HIGH PERFORMANCE SUMMER

The N'Fera Sport—engineered for drivers who demand the ultimate in ultra-high performance. Designed to elevate your sport driving experience, the N'Fera Sport delivers outstanding wet performance, improved braking capabilities, and enhanced handling, ensuring precision and control in every turn. Whether you're navigating tight corners or pushing the limits on open roads, this tire provides the grip, stability, and responsiveness you need to stay ahead of the competition.



FIRST 2/32" OR 1 YEAR

36 MONTHS

90 DAYS OR WITHIN 2/32"

OE FITMENT ON



EV COMPATIBLE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
10331NXE		215/45R17	XL	91	Y	4	50	1,356	-	7.0	7.0-8.0	8.5	24.6	9.5	280	AA	A	Black	BMW
17491NXE		215/45R17	XL	91	Y	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	9.5	280	AA	A	Black	
16662NXE		225/45R17	XL	94	Y	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	9.5	280	AA	A	Black	
17482NXE		215/40R18	XL	89	Y	4	50	1,279	-	7.5	7.0-8.0	8.6	24.8	9.5	280	AA	A	Black	
16080NXE		215/45R18	XL	93	W	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	9.5	280	AA	A	Black	
18908NXE		225/40R18	XL	92	Y	4	50	1,389	-	8.0	7.5-9.0	9.1	25.2	9.5	280	AA	A	Black	
10345NXE		225/45R18	XL	95	Y	4	50	1,521	-	8.0	7.5-9.0	9.3	26.0	9.5	280	A	A	Black	
16659NXE		235/40R18	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	9.5	280	AA	A	Black	
16664NXE		235/45R18	XL	98	Y	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	9.5	280	AA	A	Black	
11760NXE		235/55R18		100	V	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	8.5	300	A	A	Black	Audi
16653NXE		245/35R18	XL	92	Y	4	50	1,389	-	8.5	8.0-9.5	9.8	24.8	9.5	280	AA	A	Black	
16397NXE		245/40R18	XL	97	Y	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	9.5	280	AA	A	Black	
16665NXE		245/45R18	XL	100	Y	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.5	280	AA	A	Black	
16655NXE		255/35R18	XL	94	Y	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	9.5	280	AA	A	Black	

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
10



COMFORT
9



FUEL EFFICIENCY
7



HANDLING
10



WEAR LIFE
7



CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
16657NXE		265/35R18	XL	97	Y	4	50	1,609	-	9.5	9.0-10.5	10.7	25.3	9.5	280	AA	A	Black	
17467NXE		275/35R18		95	Y	4	51	1,521	-	9.5	9.0-11.0	10.9	25.6	9.5	280	AA	A	Black	
17483NXE		225/40R19	XL	93	Y	4	50	1,279	-	8.0	7.5-9.0	9.1	26.1	9.5	280	AA	A	Black	
15779NXE		225/45R19	XL	96	W	4	50	1,565	-	7.5	7.0-8.5	8.9	27.0	9.5	280	AA	A	Black	
16652NXE		235/35R19	XL	91	Y	4	50	1,356	-	8.5	8.0-9.5	9.5	25.5	9.5	280	AA	A	Black	
17490NXE		235/40R19	XL	96	Y	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.5	280	AA	A	Black	
17488NXE		245/35R19	XL	93	Y	4	50	1,433	-	8.5	8.0-9.5	9.8	25.8	9.5	280	AA	A	Black	
16660NXE		245/40R19	XL	98	Y	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	9.5	280	AA	A	Black	
**91067NXE		245/45R19	XL	102	Y	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	8.5	300	A	A	Black	Audi
16666NXE		245/45R19	XL	102	Y	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	9.5	280	AA	A	Black	
17580NXE		245/50R19	XL	105	Y	4	50	2,039	-	7.5	7.0-8.5	10.0	28.7	8.5	300	AA	A	Black	BMW
16656NXE		255/35R19	XL	96	Y	4	50	1,565	-	9.0	8.5-10.0	10.2	26.0	9.5	280	AA	A	Black	
17470NXE		255/40R19	XL	100	Y	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	9.5	280	AA	A	Black	
17480NXE		255/45R19	XL	104	Y	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	9.5	280	AA	A	Black	
15667NXE		265/35R19	XL	98	Y	4	50	1,653	-	9.5	9.0-10.5	10.7	26.3	9.5	280	AA	A	Black	
16391NXK		265/45R19	XL	105	Y	4	50	2,039	-	9.0	8.5-10.0	10.8	28.5	8.5	300	AA	A	Black	Porsche
17484NXE		275/35R19	XL	100	Y	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	9.5	280	AA	A	Black	
17469NXE		275/40R19	XL	105	Y	4	50	2,039	-	9.5	9.0-10.5	10.9	27.7	9.5	280	AA	A	Black	
16392NXK		295/40R19	XL	108	Y	4	50	2,205	-	10.5	10.0-11.5	11.9	28.1	8.5	300	AA	A	Black	Porsche
15797NXE		235/35R20	XL	92	(Y)	4	50	1,389	-	8.5	8.0-9.5	9.5	26.5	9.5	280	AA	A	Black	
14717NXE		235/60R20	XL	108	H	4	50	2,205	-	8.5	6.5-8.5	10.2	31.2	8.0	280	A	A	Black	BMW
15803NXE		245/30R20	XL	90	(Y)	4	50	1,323	-	8.5	8.0-8.5	9.8	25.8	9.5	280	AA	A	Black	
16654NXE		245/35R20	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.8	26.8	9.5	280	AA	A	Black	
17468NXE		245/40R20	XL	99	Y	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	9.5	280	AA	A	Black	
17477NXE		245/45R20	XL	103	Y	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.5	280	AA	A	Black	
17489NXE		255/35R20	XL	97	Y	4	50	1,609	-	9.0	8.5-10.0	10.2	27.0	9.5	280	AA	A	Black	
15751NXE		255/40R20	XL	101	Y	4	50	1,819	-	9.0	8.5-10.0	10.2	28.0	9.5	280	AA	A	Black	
*16084NXE		255/45R20	XL	105	Y	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	9.5	280	AA	A	Black	
15844NXE		265/30R20	XL	94	(Y)	4	50	1,477	-	9.5	9.0-10.0	10.7	26.3	9.5	280	AA	A	Black	
15850NXE		275/30R20	XL	97	Y	4	50	1,609	-	9.5	9.0-10.0	10.9	26.5	9.5	280	AA	A	Black	
17476NXE		275/35R20	XL	102	Y	4	50	1,874	-	9.5	9.0-11.0	10.9	27.6	9.5	280	AA	A	Black	
17474NXE		275/40R20	XL	106	Y	4	50	2,094	-	9.5	9.0-10.5	10.9	28.7	9.5	280	AA	A	Black	
15750NXE		275/45R20	XL	110	Y	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	9.5	280	AA	A	Black	
15746NXE		285/30R20	XL	99	(Y)	4	50	1,709	-	10.0	9.5-10.5	11.4	26.8	9.5	280	AA	A	Black	
15847NXE		285/35R20	XL	104	(Y)	4	50	1,984	-	10.0	9.5-11.0	11.4	27.9	9.5	280	AA	A	Black	
16076NXE		295/30R20	XL	101	(Y)	4	50	1,819	-	10.5	10.0-11.0	11.9	27.0	9.5	280	AA	A	Black	
16075NXE		305/30R20	XL	103	(Y)	4	50	1,709	-	11.0	10.5-11.5	12.3	27.2	9.5	280	AA	A	Black	
15744NXE		315/35R20	XL	110	Y	4	50	2,337	-	11.0	10.5-12.5	12.6	28.7	9.5	280	AA	A	Black	
15806NXE		245/35R21	XL	96	Y	4	50	1,565	-	8.5	8.0-9.5	9.8	27.8	9.5	280	AA	A	Black	
16073NXE		255/35R21	XL	98	Y	4	50	1,653	-	9.0	8.5-10.0	10.2	28.0	9.5	280	AA	A	Black	
14707NXE		255/50R21	XL	109	Y	4	50	2,271	-	9.0	7.0-9.0	11.0	31.1	8.0	280	A	A	Black	BMW
15646NXE		265/35R21	XL	101	Y	4	50	1,819	-	9.5	9.0-10.5	10.7	28.3	9.5	280	AA	A	Black	
15642NXE		275/35R21	XL	103	(Y)	4	50	1,929	-	9.5	9.0-11.0	10.9	28.5	9.5	280	AA	A	Black	
*18119NXE		285/45R21	XL	113	Y	4	50	2,535	-	10.0	9.5-10.5	11.2	31.1	8.5	300	AA	A	Black	Porsche
*18122NXE		315/40R21	XL	115	Y	4	50	2,679	-	11.0	10.5-12.5	12.4	30.9	8.5	300	AA	A	Black	Porsche

Technical data can be changed without further notice.
For more detailed OE application information, please refer to "Original Equipment 2026" page.
* N'Fera Sport SUV
** Noise Foam



ULTRA HIGH PERFORMANCE

The N'Fera SU1 has three main grooves and a semi-groove to maximize wet driving performance and enhance handling. The dry grip technology boosts handling and braking performance, while an optimum surface split siping design improves wet/dry traction performance. An equally balanced design and enhanced block rigidity disperse stress evenly during high-speed cornering, boosting cornering and steering stability.



FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
13416NXK		195/45R16	XL	84	W	4	50	1,102	-	6.5	6.0-7.5	7.7	22.9	9.5	300	AA	A	Black
12729NXK		205/40R16		79	W	4	51	963	-	7.5	7.0-8.0	8.3	22.5	9.5	300	AA	A	Black
12358NXK		215/55R16	XL	97	W	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	9.5	300	AA	A	Black
12346NXK		205/40R17	XL	84	W	4	50	1,102	-	7.5	7.0-8.0	8.3	23.5	9.5	300	AA	A	Black
12725NXK		205/45R17	XL	88	W	4	50	1,235	-	7.0	6.5-7.5	8.1	24.3	9.5	300	AA	A	Black
13053NXK		205/50R17	XL	93	W	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.5	300	AA	A	Black
12349NXK		215/40R17	XL	87	W	4	50	1,201	-	7.5	7.0-8.5	8.6	23.8	9.5	300	AA	A	Black
12351NXK		215/45R17	XL	91	W	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	9.5	300	AA	A	Black
12300NXK		225/45R17	XL	94	Y	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	9.5	300	AA	A	Black
12311NXK		235/45R17	XL	97	W	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	9.5	300	AA	A	Black
12722NXK		245/40R17	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.8	24.7	9.5	300	AA	A	Black
13418NXK		245/45R17	XL	99	Y	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	9.5	300	AA	A	Black
12731NXK		255/40R17		94	W	4	51	1,477	-	9.0	8.5-10.0	10.2	25.0	9.5	300	AA	A	Black
14112NXK		275/40R17		98	W	4	51	1,653	-	9.5	9.0-11.0	10.9	25.7	9.5	300	AA	A	Black
12348NXK		215/35R18	XL	84	Y	4	50	1,102	-	7.5	7.0-8.5	8.6	23.9	9.5	300	AA	A	Black
12350NXK		215/40R18	XL	89	Y	4	50	1,279	-	7.5	7.0-8.5	8.6	24.8	9.5	300	AA	A	Black
14096NXK		215/45R18	XL	93	W	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	9.5	300	AA	A	Black
11782NXK		225/40R18	XL	92	Y	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	9.5	300	AA	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
10



COMFORT
9




FUEL EFFICIENCY
7



HANDLING
10



WEAR LIFE
7



N'FERA SU1

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
12332NXX		225/45R18	XL	95	Y	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.5	300	AA	A	Black
12302NXX		235/40R18	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	9.5	300	AA	A	Black
14013NXX		235/45R18	XL	98	Y	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	9.5	300	AA	A	Black
12345NXX		245/35R18	XL	92	Y	4	50	1,389	-	8.5	8.0-9.5	9.8	24.8	9.5	300	AA	A	Black
12312NXX		245/40R18	XL	97	Y	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	9.5	300	AA	A	Black
12726NXX		245/45R18	XL	100	Y	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.5	300	AA	A	Black
12347NXX		255/35R18	XL	94	Y	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	9.5	300	AA	A	Black
12592NXX		255/40R18	XL	99	Y	4	50	1,709	-	9.0	8.5-10.0	10.2	26.0	9.5	300	AA	A	Black
12734NXX		255/45R18	XL	103	Y	4	50	1,929	-	8.5	8.0-9.5	10.0	27.0	9.5	300	AA	A	Black
13516NXX		265/35R18	XL	97	Y	4	50	1,609	-	9.5	9.0-10.5	10.7	25.3	9.5	300	AA	A	Black
14111NXX		265/40R18	XL	101	Y	4	50	1,819	-	9.5	9.0-10.5	10.4	26.3	9.5	300	AA	A	Black
13517NXX		275/35R18	XL	99	W	4	50	1,709	-	9.5	9.0-11.0	10.9	25.6	9.5	300	AA	A	Black
16405NXX		275/40R18	XL	103	Y	4	50	1,929	-	9.5	9.0-11.0	10.9	26.7	9.5	300	AA	A	Black
16402NXX		285/35R18	XL	101	Y	4	50	1,819	-	10.0	9.5-11.0	11.2	25.9	9.5	300	AA	A	Black
12331NXX		225/35R19	XL	88	Y	4	50	1,235	-	8.0	7.5-9.0	9.1	25.2	9.5	300	AA	A	Black
14121NXX		225/40R19	XL	93	Y	4	50	1,433	-	8.0	7.5-9.0	9.1	26.1	9.5	300	AA	A	Black
14099NXX		225/45R19	XL	96	W	4	50	1,565	-	7.5	7.0-8.5	8.9	27.0	9.5	300	AA	A	Black
12315NXX		235/35R19	XL	91	Y	4	50	1,356	-	8.5	8.0-9.5	9.5	25.5	9.5	300	AA	A	Black
15089NXX		235/40R19	XL	96	Y	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.5	300	AA	A	Black
13514NXX		245/35R19	XL	93	Y	4	50	1,433	-	8.5	8.0-9.5	9.8	25.8	9.5	300	AA	A	Black
12723NXX		245/40R19	XL	98	Y	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	9.5	300	AA	A	Black
14019NXX		245/45R19	XL	102	Y	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	9.5	300	AA	A	Black
14108NXX		255/30R19	XL	91	Y	4	50	1,356	-	9.0	8.5-9.5	10.2	25.1	9.5	300	AA	A	Black
12338NXX		255/35R19	XL	96	W	4	50	1,565	-	9.0	8.5-10.0	10.2	26.0	9.5	300	AA	A	Black
13519NXX		255/40R19	XL	100	Y	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	9.5	300	AA	A	Black
13524NXX		255/45R19	XL	104	Y	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	9.5	300	AA	A	Black
13512NXX		265/30R19	XL	93	Y	4	50	1,433	-	9.5	9.0-10.0	10.7	25.3	9.5	300	AA	A	Black
12717NXX		275/30R19	XL	96	Y	4	50	1,565	-	9.5	9.0-10.0	10.9	25.6	9.5	300	AA	A	Black
14026NXX		275/35R19	XL	100	Y	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	9.5	300	AA	A	Black
13518NXX		275/35R19	XL	100	Y	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	9.5	300	AA	A	Black
13520NXX		275/40R19	XL	105	Y	4	50	2,039	-	9.5	9.0-11.0	10.9	27.7	9.5	300	AA	A	Black
14639NXX		225/30R20	XL	85	Y	4	50	1,135	-	8.0	8.0	9.1	25.4	9.0	300	AA	A	Black
14101NXX		225/35R20	XL	90	Y	4	50	1,323	-	8.0	7.5-9.0	9.1	26.2	9.5	300	AA	A	Black
14758NXX		235/30R20	XL	88	Y	4	50	1,235	-	8.5	8.5	9.5	25.6	10.0	300	AA	A	Black
13511NXX		245/30R20	XL	90	Y	4	50	1,323	-	8.5	8.0-8.5	9.8	25.8	9.5	300	AA	A	Black
13515NXX		245/35R20	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.8	26.8	9.5	300	AA	A	Black
14031NXX		245/40R20	XL	99	Y	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	9.5	300	AA	A	Black
15090NXX		245/45R20	XL	103	Y	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.0	300	AA	A	Black
14110NXX		255/35R20	XL	97	Y	4	50	1,609	-	9.0	8.5-10.0	10.2	27.0	9.5	300	AA	A	Black
12716NXX		275/30R20	XL	97	Y	4	50	1,609	-	9.5	9.0-10.0	10.9	26.5	9.5	300	AA	A	Black
14113NXX		275/35R20	XL	102	Y	4	50	1,874	-	9.5	9.0-11.0	10.9	27.6	9.5	300	AA	A	Black
14114NXX		275/40R20	XL	106	Y	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	9.5	300	AA	A	Black
13513NXX		285/30R20	XL	99	Y	4	50	1,709	-	10.0	9.5-10.5	11.4	26.8	9.5	300	AA	A	Black
14757NXX		235/30R22	XL	90	Y	4	50	1,323	-	8.5	8.5	9.5	27.6	10.0	300	AA	A	Black
14647NXX		245/30R22	XL	92	Y	4	50	1,389	-	8.5	8.0-8.5	9.8	27.8	9.0	300	AA	A	Black
14648NXX		265/30R22	XL	97	Y	4	50	1,609	-	9.5	9.0-10.0	10.7	28.3	9.0	300	AA	A	Black
14646NXX		295/25R22	XL	97	Y	4	50	1,609	-	10.5	10.0-11.0	11.9	27.8	9.0	300	AA	A	Black
14756NXX		255/30R24	XL	97	Y	4	50	1,609	-	9.0	8.5-9.5	10.2	30.1	10.0	300	AA	A	Black
14754NXX		275/25R24	XL	96	Y	4	50	1,565	-	10.0	10.0-10.5	11.1	29.4	10.0	300	AA	A	Black
14755NXX		275/30R24	XL	101	Y	4	50	1,819	-	9.5	9.0-10.0	10.9	30.6	10.0	300	AA	A	Black

Technical data can be changed without further notice

N'FERA AU7

ULTRA HIGH PERFORMANCE ALL SEASON

The N'Fera AU7 is designed for the discretionary driver of sports cars, luxury coupes, and performance sedans looking for superior traction in dry and wet conditions. The N'Fera AU7 stands out against the competition, especially in wet conditions.




FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

OE FITMENT ON



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
14208NXX		205/55R16		91	W	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	9.0	500	AA	A	Black	
16643NXX		205/60R16		92	H	4	51	1,389	-	6.0	5.5-7.5	8.2	25.7	9.0	500	A	A	Black	VW
15625NXX		205/45R17	XL	88	W	4	50	1,235	-	7.0	6.5-7.5	8.1	24.3	9.0	500	AA	A	Black	
14404NXX		205/50R17	XL	93	W	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.0	500	AA	A	Black	
16694NXX		205/55R17		91	H	4	51	1,356	-	6.5	5.5-7.5	8.7	25.9	9.0	500	A	A	Black	VW
14403NXX		215/45R17	XL	91	W	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	9.0	500	AA	A	Black	
15227NXX		215/50R17	XL	95	W	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	9.0	500	AA	A	Black	
14401NXX		215/55R17		94	W	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	500	AA	A	Black	
16313NXX		215/55R17		94	H	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	560	A	A	Black	VW
15113NXX		225/45R17	XL	94	W	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	9.0	500	AA	A	Black	
17577NXX		225/45R17		91	H	4	51	1,356	-	7.5	7.0-8.5	8.9	25.0	9.5	500	A	A	Black	Audi
14400NXX		225/50R17	XL	98	W	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	9.0	500	AA	A	Black	
14402NXX		225/55R17		97	W	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	500	AA	A	Black	
15228NXX		235/45R17	XL	97	W	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	9.0	500	AA	A	Black	
15626NXX		235/55R17		99	W	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.0	500	AA	A	Black	
14419NXX		245/40R17		91	W	4	51	1,356	-	8.5	8.0-9.5	9.8	24.7	9.0	500	AA	A	Black	
15229NXX		245/45R17	XL	99	W	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	9.0	500	AA	A	Black	
15627NXX		215/40R18		85	W	4	51	1,135	-	7.5	7.0-8.5	8.6	24.8	9.0	500	AA	A	Black	
14416NXX		215/45R18		89	W	4	51	1,279	-	7.0	7.0-8.0	8.4	25.6	9.0	500	AA	A	Black	

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
14422NXX		225/40R18	XL	92	W	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	9.0	500	AA	A	Black	
14412NXX		225/45R18	XL	95	Y	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.0	500	AA	A	Black	
14406NXX		225/50R18	XL	99	W	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	9.0	500	AA	A	Black	
15231NXX		235/40R18	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	9.0	500	AA	A	Black	
15230NXX		235/45R18	XL	98	W	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	9.0	500	AA	A	Black	
15114NXX		235/50R18		97	W	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.0	500	AA	A	Black	
14411NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	9.0	500	AA	A	Black	
14410NXX		245/45R18	XL	100	W	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.0	500	AA	A	Black	
15628NXX		245/50R18		100	W	4	51	1,764	-	7.5	7.0-8.5	10.0	27.7	9.0	500	AA	A	Black	
17589NXX		245/55R18		103	Y	4	51	1,929	-	7.5	7.0-8.5	10.0	28.6	11.0	500	AA	A	Black	Dodge
15232NXX		255/35R18	XL	94	W	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	9.0	500	AA	A	Black	
14421NXX		255/40R18		95	Y	4	51	1,521	-	9.0	8.5-10.0	10.2	26.0	9.0	500	AA	A	Black	
14414NXX		255/45R18		99	W	4	51	1,709	-	8.5	8.0-9.5	10.0	27.0	9.0	500	AA	A	Black	
15636NXX		275/35R18		95	Y	4	51	1,521	-	9.5	9.0-11.0	10.9	25.6	9.0	500	AA	A	Black	
17464NXX		225/40R19	XL	93	Y	4	50	1,433	-	8.0	7.5-9.0	9.1	26.1	9.0	500	AA	A	Black	
14418NXX		225/45R19	XL	96	W	4	50	1,565	-	7.5	7.0-8.5	8.9	27.0	9.0	500	AA	A	Black	
15234NXX		235/40R19	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.0	500	AA	A	Black	
15629NXX		235/45R19		95	W	4	51	1,521	-	8.0	7.5-9.0	9.3	27.4	9.0	500	AA	A	Black	
14420NXX		245/40R19	XL	98	Y	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	9.0	500	AA	A	Black	
14415NXX		245/45R19	XL	102	W	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	9.0	500	AA	A	Black	
15630NXX		255/35R19	XL	96	Y	4	50	1,565	-	9.0	8.5-10.0	10.2	26.0	9.0	500	AA	A	Black	
14423NXX		255/40R19	XL	100	Y	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	9.0	500	AA	A	Black	
15233NXX		255/45R19		100	W	4	51	1,764	-	8.5	8.0-9.5	10.0	28.1	9.0	500	AA	A	Black	
15631NXX		275/35R19		96	Y	4	51	1,565	-	9.5	9.0-11.0	10.9	26.6	9.0	500	AA	A	Black	
15633NXX		275/40R19		101	Y	4	51	1,819	-	9.5	9.0-11.0	10.9	27.7	9.0	500	AA	A	Black	
15637NXX		225/35R20	XL	90	W	4	50	1,323	-	8.0	7.5-9.0	9.1	26.2	9.0	500	AA	A	Black	
15638NXX		245/35R20	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.8	26.8	9.0	500	AA	A	Black	
15624NXX		245/40R20	XL	99	Y	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	9.0	500	AA	A	Black	
14413NXX		245/45R20	XL	103	W	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.0	500	AA	A	Black	
15634NXX		255/35R20	XL	97	Y	4	50	1,609	-	9.0	8.5-10.0	10.2	27.0	9.0	500	AA	A	Black	
17590NXX		255/45R20	XL	105	V	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	9.0	500	A	A	Black	Dodge
15635NXX		275/35R20	XL	102	Y	4	50	1,874	-	9.5	9.0-11.0	10.9	27.6	9.0	500	AA	A	Black	

Technical data can be changed without further notice.
For more detailed OE application information, please refer to "Original Equipment 2026" page.

N'BLUE 4Season2

ALL-WEATHER TOURING

The N'BLUE 4 Season 2 is Nexen Tire's most recent all-weather tire designed for various on-road conditions. It not only improves snow performance, but also adds stability to high-speed driving with an all-weather optimized pattern design. In addition, this tire claims to have a longer treadlife.



FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
16096NXX		195/65R15	XL	95	V	4	50	1,521	-	6.0	5.5-7.0	7.9	25.0	10.0	600	A	A	Black
16099NXX		205/55R16	XL	94	V	4	50	1,356	-	6.5	5.5-7.5	8.4	24.9	10.0	600	A	A	Black
16090NXX		205/60R16	XL	96	V	4	50	1,389	-	6.0	5.5-7.5	8.2	25.7	10.0	600	A	A	Black
19174NXX		205/65R16		95	H	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	10.0	600	A	A	Black
19175NXX		215/55R16	XL	97	V	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	10.0	600	A	A	Black
19162NXX		215/60R16		95	V	4	51	1,521	-	6.5	6.0-7.5	8.7	26.1	10.0	600	A	A	Black
19179NXX		215/65R16	XL	102	V	4	50	1,874	-	6.5	6.0-7.5	8.7	27.0	10.0	600	A	A	Black
1A003NXX		215/70R16		100	H	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	10.0	600	A	A	Black
1A010NXX		225/60R16		98	V	4	51	1,653	-	6.5	6.0-8.0	9.0	26.6	10.0	600	A	A	Black
1A043NXX		195/60R17		90	V	4	51	1,323	-	6.0	5.5-7.0	7.9	26.2	10.0	600	A	A	Black
19160NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	10.0	600	A	A	Black
1A008NXX		205/55R17	XL	95	V	4	50	1,521	-	6.5	5.5-7.5	8.4	25.9	10.0	600	A	A	Black
16095NXX		215/45R17	XL	91	W	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	10.0	600	A	A	Black
19165NXX		215/50R17	XL	95	W	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	10.0	600	A	A	Black
16191NXX		215/55R17	XL	98	W	4	50	1,477	-	7.0	6.0-7.5	8.9	26.3	10.0	600	A	A	Black
19184NXX		215/60R17	XL	100	V	4	50	1,764	-	6.5	6.0-7.5	8.7	27.2	10.0	600	A	A	Black
19185NXX		215/65R17		99	H	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	10.0	600	A	A	Black
16105NXX		225/45R17	XL	94	W	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	10.0	600	A	A	Black
19166NXX		225/50R17	XL	98	W	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	10.0	600	A	A	Black
19181NXX		225/55R17	XL	101	W	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	10.0	600	A	A	Black
16100NXX		225/60R17	XL	103	V	4	50	1,709	-	6.5	6.0-8.0	9.0	27.6	10.0	600	A	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
9



COMFORT
8



FUEL EFFICIENCY
8



HANDLING
9



WEAR LIFE
9



3 Peak Mountain
Snowflake
Certified



CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
16093NXX		225/65R17	XL	106	V	4	50	1,874	-	6.5	6.0-8.0	9.0	28.5	10.0	600	A	A	Black
19177NXX		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	10.0	600	A	A	Black
19169NXX		235/60R17		102	H	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	10.0	600	A	A	Black
16197NXX		235/65R17	XL	108	W	4	50	1,984	-	7.0	6.5-8.5	9.4	29.1	10.0	600	A	A	Black
19167NXX		215/55R18	XL	99	V	4	50	1,709	-	7.0	6.0-7.5	8.9	27.3	10.0	600	A	A	Black
16092NXX		225/40R18	XL	92	Y	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	10.0	600	A	A	Black
16189NXX		225/45R18	XL	95	Y	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	10.0	600	A	A	Black
19170NXX		225/50R18	XL	99	W	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	10.0	600	A	A	Black
19171NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	10.0	600	A	A	Black
19182NXX		225/60R18	XL	104	V	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	10.0	600	A	A	Black
16192NXX		235/40R18	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	10.0	600	A	A	Black
16193NXX		235/45R18	XL	98	Y	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	10.0	600	A	A	Black
19158NXX		235/50R18		97	W	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	10.0	600	A	A	Black
19172NXX		235/55R18		100	V	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	10.0	600	A	A	Black
16188NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	10.0	600	A	A	Black
19178NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	10.0	600	A	A	Black
19161NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	10.0	600	A	A	Black
19176NXX		245/45R18	XL	100	W	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	10.0	600	A	A	Black
16107NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	10.0	600	A	A	Black
1A019NXX		255/60R18	XL	112	V	4	50	2,469	-	7.5	7.0-9.0	10.2	30.0	10.0	600	A	A	Black
19159NXX		225/55R19	XL	103	V	4	50	1,929	-	7.0	6.0-8.0	9.2	28.8	10.0	600	A	A	Black
19164NXX		235/40R19	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	10.0	600	A	A	Black
16104NXX		235/45R19	XL	99	W	4	50	1,709	-	8.0	7.5-9.0	9.3	27.4	10.0	600	A	A	Black
19183NXX		235/50R19	XL	103	V	4	50	1,929	-	7.5	6.5-8.5	9.6	28.3	10.0	600	A	A	Black
16089NXX		235/55R19	XL	105	W	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	10.0	600	A	A	Black
16106NXX		245/40R19	XL	98	Y	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	10.0	600	A	A	Black
19168NXX		245/45R19	XL	102	W	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	10.0	600	A	A	Black
19180NXX		245/55R19		103	V	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	10.0	600	A	A	Black
1A013NXX		255/45R19	XL	104	W	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	10.0	600	A	A	Black
1A012NXX		235/50R20	XL	104	W	4	50	1,984	-	7.5	6.5-8.5	9.6	29.3	10.0	600	A	A	Black
19173NXX		235/55R20		102	V	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	10.0	600	A	A	Black
1A021NXX		245/45R20	XL	103	W	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	10.0	600	A	A	Black
16108NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	10.0	600	A	A	Black
1A005NXX		255/45R20	XL	105	W	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	10.0	600	A	A	Black
16190NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	10.0	600	A	A	Black
19163NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	10.0	600	A	A	Black
1A017NXX		265/45R20	XL	108	W	4	50	2,205	-	9.0	8.5-10.0	10.5	29.4	10.0	600	A	A	Black
1A006NXX		265/45R21	XL	108	W	4	50	2,205	-	9.0	8.5-10.0	10.5	30.4	10.0	600	A	A	Black
1A011NXX		275/45R21	XL	110	W	4	50	2,337	-	9.0	8.5-10.5	10.7	30.7	10.0	600	A	A	Black

Technical data can be changed without further notice.

NEW

GRAND TOURING ALL SEASON

The N'Priz S is built for passenger Sedans and EVs, delivering consistent performance across every drive. Its advanced design maximizes tread life, reduces noise, and enhances ride comfort — giving drivers a smooth, quiet, and reliable ride from start to finish.

60,000 FOR EVS

80,000 MILES

FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

EV COMPATIBLE

OE FITMENT ON

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
12798NXX		195/65R15		91	H	4	51	1,356	-	6.0	5.5-7.0	7.9	25.0	10.0	700	A	A	Black	
12797NXX		185/55R16		83	H	4	51	1,074	-	6.0	5.0-6.5	7.6	24.0	10.0	700	A	A	Black	
12799NXX		185/60R16		86	H	4	51	1,168	-	5.5	5.0-6.5	7.4	24.7	10.0	700	A	A	Black	
12796NXX		195/50R16		84	V	4	51	1,102	-	6.0	5.5-7.0	7.9	23.7	10.0	700	A	A	Black	
19502NXX		195/55R16		87	W	4	51	1,201	-	6.0	5.5-7.0	7.9	24.4	10.0	700	A	A	Black	
12844NXX		205/55R16		91	V	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	10.0	700	A	A	Black	
17195NXX		205/60R16		92	H	4	51	1,389	-	6.5	5.5-7.5	8.5	25.9	9.0	560	A	A	Black	Kia
12819NXX		205/65R16		95	H	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	10.0	700	A	A	Black	
NEW 18638NXX		205/65R16		95	H	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	9.0	560	A	A	Black	Kia
12827NXX		215/55R16	XL	97	V	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	10.0	700	A	A	Black	
12814NXX		215/60R16		95	V	4	51	1,521	-	6.5	6.0-7.5	8.7	26.1	10.0	700	A	A	Black	
19514NXX		225/55R16		95	V	4	51	1,521	-	7.0	6.0-8.0	9.2	25.7	10.0	700	A	A	Black	
12813NXX		225/60R16		98	H	4	51	1,653	-	6.5	6.0-8.0	9.0	26.6	10.0	700	A	A	Black	
12809NXX		225/65R16		100	H	4	51	1,764	-	6.5	6.0-8.0	9.0	27.5	10.0	700	A	A	Black	
19512NXX		195/60R17		90	H	4	51	1,323	-	6.0	5.5-7.0	7.9	26.2	10.0	700	A	A	Black	
12870NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	10.0	700	A	A	Black	
12822NXX		205/55R17	XL	95	V	4	50	1,521	-	6.5	5.5-7.5	8.4	25.9	10.0	700	A	A	Black	
12810NXX		215/45R17	XL	91	V	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	10.0	700	A	A	Black	
12826NXX		215/50R17	XL	95	V	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	10.0	700	A	A	Black	

CONTINUED ON NEXT PAGE...

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
18382NXX		215/55R17		94	V	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	560	A	A	Black	Kia
17068NXX		215/55R17		94	V	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	560	A	A	Black	Hyundai/Kia
12858NXX		225/45R17	XL	94	V	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	10.0	700	A	A	Black	
12830NXX		225/50R17	XL	98	V	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	10.0	700	A	A	Black	
12800NXX		225/55R17	XL	101	V	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	10.0	700	A	A	Black	
12859NXX		235/45R17	XL	97	V	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	10.0	700	A	A	Black	
12824NXX		235/50R17		96	V	4	51	1,565	-	7.5	6.5-8.5	9.6	26.3	10.0	700	A	A	Black	
19501NXX		235/55R17	XL	103	V	4	50	1,929	-	7.5	6.5-8.5	9.6	27.2	10.0	700	A	A	Black	
12818NXX		215/45R18	XL	93	V	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	10.0	700	A	A	Black	
12828NXX		215/50R18		92	V	4	51	1,389	-	7.0	6.0-7.5	8.9	26.5	10.0	700	A	A	Black	
12779NXX		225/40R18	XL	92	V	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	10.0	700	A	A	Black	
12523NXX		225/45R18	XL	95	V	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	10.0	700	A	A	Black	
12683NXX		225/50R18	XL	99	V	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	10.0	700	A	A	Black	
12588NXX		235/40R18	XL	95	V	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	10.0	700	A	A	Black	
12597NXX		235/45R18	XL	98	V	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	10.0	700	A	A	Black	
12739NXX		235/50R18		97	V	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	10.0	700	A	A	Black	
12703NXX		245/40R18	XL	97	V	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	10.0	700	A	A	Black	
12538NXX		245/45R18	XL	100	V	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	10.0	700	A	A	Black	
12579NXX		245/50R18		100	V	4	51	1,764	-	7.5	7.0-8.5	10.0	27.7	10.0	700	A	A	Black	
12599NXX		245/55R18		103	V	4	51	1,929	-	7.5	7.0-8.5	10.0	28.6	10.0	700	A	A	Black	
19526NXX		195/50R19		88	H	4	51	1,235	-	6.0	5.5-7.0	7.9	26.7	10.0	700	A	A	Black	
19507NXX		235/40R19	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	10.0	700	A	A	Black	
19111NXX		245/40R19	XL	98	W	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	10.0	700	A	A	Black	
19117NXX		245/45R19	XL	102	W	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	10.0	700	A	A	Black	
12747NXX		255/45R19	XL	104	V	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	10.0	700	A	A	Black	
19109NXX		275/35R19	XL	100	W	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	10.0	700	A	A	Black	
19113NXX		275/40R19	XL	105	W	4	50	2,039	-	9.5	9.0-11.0	10.9	27.7	10.0	700	A	A	Black	
12551NXX		245/40R20		95	V	4	51	1,521	-	8.5	8.0-9.5	9.8	27.7	10.0	700	A	A	Black	
12503NXX		245/45R20	XL	103	V	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	10.0	700	A	A	Black	
12682NXX		255/40R20	XL	101	V	4	50	1,819	-	9.0	8.5-10.0	10.2	28.0	10.0	700	A	A	Black	

Technical data can be changed without further notice.
For more detailed OE application information, please refer to "Original Equipment 2026" page.

Aria AH7

PREMIUM STANDARD TOURING ALL SEASON

The Aria AH7 includes a four-groove design, which leverages optimal driving performance on wet roads in all four seasons. This tire has a uniformly designed center, which evenly distributes external pressure when contacting the road surface and prevents one-sided wear. The five random pitch variation design reduces pattern noise, and the increased block stiffness and uniform block distribution deliver maximum grip during high-speed cornering.



FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15190NXX		195/65R15		91	H	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	10.5	760	A	A	Black
15194NXX		205/55R16		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	10.5	760	A	A	Black
15193NXX		205/60R16		92	H	4	44	1,389	-	6.0	5.5-7.5	8.2	25.7	10.5	760	A	A	Black
15191NXX		205/65R16		95	H	4	44	1,521	-	6.0	5.5-7.5	8.2	26.5	10.5	760	A	A	Black
14501NXX		215/60R16		95	T	4	44	1,521	-	6.5	6.0-7.5	8.7	26.1	10.5	760	A	A	Black
15192NXX		215/65R16		98	T	4	44	1,653	-	6.5	6.0-7.5	8.7	27.0	10.5	760	A	A	Black
15693NXX		215/70R16		100	H	4	44	1,764	-	6.5	5.5-7.0	8.7	27.9	10.5	760	A	A	Black
14311NXX		225/60R16		98	H	4	44	1,653	-	6.5	6.0-8.0	9.0	26.6	10.5	760	A	A	Black
13044NXX		225/65R16		100	T	4	44	1,764	-	6.5	6.0-8.0	9.0	27.5	10.5	760	A	A	Black
13046NXX		235/65R16		103	T	4	44	1,929	-	7.0	6.5-8.5	9.4	28.0	10.5	760	A	A	Black
15195NXX		215/55R17		94	H	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	10.5	760	A	A	Black
15155NXX		215/60R17		96	H	4	44	1,565	-	6.5	6.0-7.5	8.7	27.2	10.5	760	A	A	Black
13043NXX		215/65R17		99	T	4	44	1,709	-	6.5	6.0-7.5	8.7	28.0	10.5	760	A	A	Black
15198NXX		225/50R17		94	H	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	10.5	760	A	A	Black
13049NXX		225/55R17		97	H	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	10.5	760	A	A	Black
13041NXX		225/60R17		99	T	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	10.5	760	A	A	Black
15157NXX		225/65R17		102	H	4	44	1,874	-	6.5	6.0-8.0	9.0	28.5	10.5	760	A	A	Black
13042NXX		235/60R17		102	H	4	44	1,874	-	7.0	6.5-8.5	9.4	28.1	10.5	760	A	A	Black
13047NXX		235/65R17		104	T	4	44	1,984	-	7.0	6.5-8.5	9.4	29.1	10.5	760	A	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
7



COMFORT
8




FUEL EFFICIENCY
8



HANDLING
8



WEAR LIFE
10



Aria AH7

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15196NXX		215/55R18		95	T	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	10.5	760	A	A	Black
15199NXX		225/50R18		95	T	4	51	1,521	-	7.0	6.0-8.0	9.2	26.9	10.5	760	A	A	Black
15197NXX		225/55R18		98	T	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	10.5	760	A	A	Black
13312NXX		235/55R18		100	H	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	10.5	760	A	A	Black
13313NXX		235/60R18		103	H	4	44	1,929	-	7.0	6.5-8.5	9.4	29.1	10.5	760	A	A	Black
13048NXX		235/65R18		106	H	4	44	2,094	-	7.0	6.5-8.5	9.4	30.0	10.5	760	A	A	Black

Technical data can be changed without further notice.

N5000 Platinum

GRAND TOURING ALL SEASON

Enjoy a smooth ride, all year long. The upgraded Nexen N5000 Platinum combines the look of a performance tire with the comfortable, quiet ride of a passenger tire. Branded with the M+S symbol, this tire provides year-round traction, even in light snow. And with its long tread life, the Nexen N5000 Platinum can handle some serious mileage. Try the tire that looks great and performs even better.



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
18212NXX		195/50R16		84	V	4	51	1,102	-	6.0	5.5-7.0	7.9	23.7	9.5	700	A	A	Black
18175NXX		205/55R16		91	V	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	9.5	700	A	A	Black
18164NXX		215/55R16	XL	97	H	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	9.5	700	A	A	Black
18213NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.5	700	A	A	Black
18162NXX		215/45R17		87	W	4	51	1,201	-	7.0	7.0-8.0	8.4	24.6	9.5	580	A	A	Black
18160NXX		215/50R17	XL	95	W	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	9.5	580	A	A	Black
17422NXX		215/55R17		94	V	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	10.0	700	A	A	Black
18151NXX		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	10.0	700	A	A	Black
18177NXX		215/65R17		99	H	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	10.0	700	A	A	Black
18173NXX		225/45R17		91	W	4	51	1,356	-	7.5	7.0-8.5	8.9	25.0	9.5	580	A	A	Black
18166NXX		225/50R17		94	W	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.5	580	A	A	Black
18182NXX		225/55R17		97	W	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	9.5	580	A	A	Black
18167NXX		225/60R17		99	H	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	10.0	700	A	A	Black
18196NXX		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	10.0	700	A	A	Black
18191NXX		235/45R17	XL	97	W	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	9.5	580	A	A	Black
18155NXX		235/50R17		96	V	4	51	1,565	-	7.5	6.5-8.5	9.6	26.3	9.5	700	A	A	Black
18158NXX		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	10.0	700	A	A	Black
18180NXX		235/60R17		102	H	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	10.0	700	A	A	Black
18194NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	10.0	700	A	A	Black
18179NXX		245/40R17		91	W	4	51	1,356	-	8.5	8.0-9.5	9.8	24.7	9.5	580	A	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING 8



COMFORT 10




FUEL EFFICIENCY 8



HANDLING 8



WEAR LIFE 10



N5000 Platinum

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread- wear	Trac.	Temp.	
18183NXX		245/65R17		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	10.0	700	A	A	Black
18185NXX		245/70R17		110	H	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	10.0	700	A	A	Black
18170NXX		265/65R17		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	30.6	10.0	700	A	A	Black
18176NXX		215/45R18	XL	93	W	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	9.5	580	A	A	Black
18150NXX		215/55R18		95	H	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	9.5	700	A	A	Black
17272NXX		225/40R18	XL	92	W	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	10.0	580	A	A	Black
18156NXX		225/45R18	XL	95	W	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.5	580	A	A	Black
18205NXX		225/50R18	XL	99	W	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	9.5	580	A	A	Black
18216NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	10.0	700	A	A	Black
18149NXX		225/60R18	XL	104	H	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	10.0	700	A	A	Black
18209NXX		235/40R18	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	9.5	580	A	A	Black
18210NXX		235/45R18	XL	98	W	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	9.5	580	A	A	Black
18187NXX		235/50R18		97	W	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.5	580	A	A	Black
18181NXX		235/55R18		100	V	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	10.0	700	A	A	Black
18204NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	10.0	700	A	A	Black
18152NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	10.0	700	A	A	Black
18192NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	9.5	580	A	A	Black
18184NXX		245/45R18	XL	100	W	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.5	580	A	A	Black
18174NXX		245/50R18		100	W	4	51	1,764	-	7.5	7.0-8.5	10.0	27.7	9.5	580	A	A	Black
18190NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	10.0	700	A	A	Black
18217NXX		255/35R18	XL	94	W	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	9.5	580	A	A	Black
18154NXX		255/55R18	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	10.0	700	A	A	Black
18215NXX		255/65R18		111	H	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	10.0	700	A	A	Black
18159NXX		265/60R18		110	V	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	10.0	700	A	A	Black
18208NXX		225/55R19		99	V	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	10.0	700	A	A	Black
18211NXX		235/40R19	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.5	580	A	A	Black
18201NXX		235/45R19	XL	99	W	4	50	1,709	-	8.0	7.5-9.0	9.3	27.4	9.5	580	A	A	Black
18168NXX		235/50R19	XL	103	V	4	50	1,929	-	7.5	6.5-8.5	9.6	28.3	10.0	700	A	A	Black
18202NXX		235/55R19	XL	105	V	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	10.0	700	A	A	Black
18197NXX		245/40R19	XL	98	W	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	9.5	580	A	A	Black
18200NXX		245/55R19		103	V	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	10.0	700	A	A	Black
18161NXX		255/40R19	XL	100	W	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	9.5	580	A	A	Black
18178NXX		255/45R19	XL	104	V	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	9.5	700	A	A	Black
18172NXX		255/60R19		109	H	4	51	2,271	-	7.5	7.0-9.0	10.2	31.1	10.0	700	A	A	Black
16692NXX		265/50R19	XL	110	W	4	50	2,337	-	8.5	7.5-9.5	10.9	29.5	9.5	580	A	A	Black
18195NXX		275/35R19	XL	100	W	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	9.5	580	A	A	Black
18198NXX		235/55R20		102	V	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	10.0	700	A	A	Black
18189NXX		245/35R20	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.8	26.8	9.5	580	A	A	Black
18218NXX		245/40R20	XL	99	W	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	9.5	580	A	A	Black
18163NXX		245/45R20	XL	103	W	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.5	580	A	A	Black
18294NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	10.0	700	A	A	Black
18206NXX		255/35R20	XL	97	W	4	50	1,609	-	9.0	8.5-10.0	10.2	27.0	9.5	580	A	A	Black
16872NXX		255/40R20	XL	101	Y	4	50	1,819	-	9.0	8.5-10.0	10.2	28.0	9.5	580	A	A	Black
18165NXX		255/45R20	XL	105	W	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	9.5	580	A	A	Black
18186NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	10.0	700	A	A	Black
18153NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	10.0	700	A	A	Black
18214NXX		265/45R20	XL	108	V	4	50	2,205	-	9.0	8.5-10.0	10.5	29.4	10.0	700	A	A	Black
18199NXX		265/50R20		107	V	4	51	2,149	-	8.5	7.5-9.5	10.9	30.5	10.0	700	A	A	Black
18207NXX		275/40R20	XL	106	W	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	9.5	580	A	A	Black
18219NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	10.0	700	A	A	Black
16523NXX		275/50R20	XL	113	W	4	50	2,535	-	8.5	7.5-9.5	11.2	30.9	9.5	580	A	A	Black
16687NXX		245/35R21	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.8	27.8	9.5	580	A	A	Black
16574NXX		255/40R21	XL	102	W	4	50	1,874	-	9.0	8.5-10.0	10.2	29.0	9.5	580	A	A	Black
16522NXX		275/40R22	XL	107	W	4	50	2,149	-	9.5	9.0-11.0	10.9	30.7	9.5	580	A	A	Black

Technical data can be changed without further notice.

N'PRIZ AH8

GRAND TOURING ALL SEASON

The N'Priz AH8 is designed for family sedans that require all-year traction in dry, wet, and light snow conditions. Performance in light snow conditions is superior to its predecessor, the CP672.



FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

OE FITMENT ON



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
14699NXX		185/65R14		86	H	4	44	1,168	-	5.5	5.0-6.5	7.4	23.5	9.0	600	A	A	Black	
17612NXX	P	185/60R15		84	H	4	44	1,102	-	5.5	5.0-6.5	7.4	23.7	9.0	440	A	A	Black	
14979NXX		185/65R15		88	H	4	44	1,235	-	5.5	5.0-6.5	7.4	24.4	9.0	500	A	A	Black	
15120NXX		195/60R15		88	H	4	44	1,235	-	6.0	5.5-7.0	7.9	24.2	9.0	600	A	A	Black	
13466NXX		195/65R15		91	T	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	9.0	500	A	A	Black	Kia
14386NXX		195/65R15		91	T	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	9.0	500	A	A	Black	Hyundai
15711NXX		195/65R15		91	H	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	9.0	500	A	A	Black	
15117NXX		205/65R15		94	H	4	44	1,477	-	6.0	5.5-7.5	8.2	25.5	9.0	600	A	A	Black	
15521NXX		185/55R16		83	H	4	51	1,074	-	6.0	5.0-6.5	7.6	24.0	9.0	600	A	A	Black	
16407NXX		185/60R16		86	H	4	51	1,168	-	5.5	5.0-6.5	7.4	24.7	9.0	600	A	A	Black	
15517NXX		195/50R16		84	V	4	51	1,102	-	6.0	5.5-7.0	7.9	23.7	9.0	600	A	A	Black	
15523NXX		195/55R16		87	V	4	51	1,201	-	6.0	5.5-7.0	7.9	24.4	9.0	600	A	A	Black	
15518NXX		205/50R16		87	V	4	51	1,201	-	6.5	5.5-7.5	8.4	24.1	9.0	600	A	A	Black	
14194NXX		205/55R16		91	H	4	44	1,356	-	6.5	5.5-7.5	8.4	24.9	10.0	560	A	A	Black	Hyundai
15710NXX		205/55R16		91	V	4	44	1,356	-	6.5	5.5-7.5	8.4	24.9	10.0	560	A	A	Black	
15605NXX		205/60R16		92	H	4	44	1,389	-	6.0	5.5-7.5	8.2	25.7	9.0	500	A	A	Black	Hyundai
13904NXX		205/65R16		95	H	4	44	1,521	-	6.0	5.5-7.5	8.2	26.5	10.0	440	A	A	Black	Kia
15677NXX	P	205/70R16		96	H	4	44	1,565	-	6.0	5.0-7.0	8.2	27.3	9.0	600	A	A	Black	
14369NXX		215/55R16	XL	97	H	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	10.0	440	A	A	Black	Ram
14691NXX		215/60R16		95	V	4	44	1,521	-	6.5	6.0-7.5	8.7	26.1	9.0	600	A	A	Black	

N'PRIZ AH8

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
14693NXX		215/65R16		98	V	4	44	1,653	-	6.5	6.0-7.5	8.7	27.0	9.0	600	A	A	Black	
14705NXX		225/55R16		95	V	4	51	1,521	-	7.0	6.0-8.0	9.2	25.7	9.0	600	A	A	Black	
14702NXX		225/60R16		98	V	4	44	1,653	-	6.5	6.0-8.0	9.0	26.6	9.0	600	A	A	Black	
15118NXX		225/65R16		100	H	4	44	1,764	-	6.5	6.0-8.0	9.0	27.5	9.0	600	A	A	Black	
15123NXX		235/60R16		100	H	4	44	1,764	-	7.0	6.5-8.5	9.4	27.1	9.0	600	A	A	Black	
15119NXX		235/65R16		103	H	4	44	1,929	-	7.0	6.5-8.5	9.4	28.0	9.0	600	A	A	Black	
15712NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.0	600	A	A	Black	
15530NXX		205/55R17		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	25.9	9.0	500	A	A	Black	VW
16094NXX		205/55R17		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	25.9	9.0	500	A	A	Black	Hyundai
14749NXX		215/45R17		87	H	4	44	1,201	-	7.0	7.0-8.0	8.4	24.6	9.0	500	A	A	Black	Hyundai
14697NXX		215/50R17		91	V	4	51	1,356	-	7.0	6.0-7.5	8.9	25.5	9.0	600	A	A	Black	
16383NXX		215/55R17		94	V	4	44	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	500	A	A	Black	Hyundai
14698NXX		215/60R17		96	V	4	44	1,565	-	6.5	6.0-7.5	8.7	27.2	9.0	600	A	A	Black	
14198NXX / 1A802NXX		225/45R17		91	W	4	44	1,356	-	7.5	7.0-8.5	8.9	25.0	9.0	500	A	A	Black	Hyundai
14701NXX		225/50R17		94	V	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.0	600	A	A	Black	
14694NXX		225/55R17		97	V	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	600	A	A	Black	
15121NXX		225/60R17		99	H	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	9.0	600	A	A	Black	
14753NXX		235/45R17		94	V	4	51	1,477	-	8.0	7.5-9.0	9.3	25.4	9.0	600	A	A	Black	
15353NXX		235/50R17		96	H	4	51	1,565	-	7.5	6.5-8.5	9.6	26.3	9.0	600	A	A	Black	
14704NXX		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.0	600	A	A	Black	
14712NXX		245/45R17		95	V	4	51	1,521	-	8.0	7.5-9.0	9.6	25.7	9.0	600	A	A	Black	
15520NXX	P	245/50R17		98	V	4	51	1,653	-	7.5	7.0-8.5	10.0	26.7	9.0	600	A	A	Black	
17613NXX		215/45R18		89	V	4	44	1,279	-	7.0	7.0-8.0	8.4	25.6	9.0	440	A	A	Black	
15359NXX		215/55R18		95	H	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	9.0	600	A	A	Black	
14708NXX		225/40R18		88	W	4	51	1,235	-	8.0	7.5-9.0	9.1	25.1	9.0	500	A	A	Black	Hyundai
15348NXX		225/45R18		91	H	4	51	1,356	-	7.5	7.0-8.5	8.9	25.9	9.0	600	A	A	Black	
14706NXX		225/50R18		95	V	4	51	1,521	-	7.0	6.0-8.0	9.2	26.9	9.0	600	A	A	Black	
14710NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	9.0	600	A	A	Black	
15122NXX		225/60R18		100	H	4	44	1,764	-	6.5	6.0-8.0	9.0	28.6	9.0	600	A	A	Black	
15346NXX		235/40R18		91	H	4	51	1,356	-	8.5	8.0-9.5	9.5	25.4	9.0	600	A	A	Black	
15349NXX		235/45R18		94	H	4	51	1,477	-	8.0	7.5-9.0	9.3	26.3	9.0	600	A	A	Black	
15356NXX		235/50R18		97	H	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.0	600	A	A	Black	
15524NXX		235/55R18		100	H	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	9.0	600	A	A	Black	
14714NXX		245/40R18		93	V	4	51	1,433	-	8.5	8.0-9.5	9.8	25.7	9.0	600	A	A	Black	
15351NXX		245/45R18		96	H	4	51	1,565	-	8.0	7.5-9.0	9.6	26.7	9.0	600	A	A	Black	
15357NXX		245/50R18		100	H	4	51	1,764	-	7.5	7.0-8.5	10.0	27.7	9.0	600	A	A	Black	
15525NXX	P	245/55R18		102	H	4	51	1,874	-	7.5	7.0-8.5	10.0	28.6	9.0	600	A	A	Black	
15360NXX		225/55R19		99	H	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	9.0	600	A	A	Black	

Technical data can be changed without further notice.

N'PRIZ AH5

STANDARD TOURING ALL SEASON

The N'Priz AH5 has four wide longitudinal grooves that improve drainage performance; a rigid shoulder block design to enhance cornering, handling, and a quiet, comfortable ride; and a dual-kerf design to enhance block stiffness and mileage.



FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
16406NXX		165/65R14		79	S	4	51	963	-	5.0	4.5-6.0	6.7	22.4	9.0	460	A	A	Black	
15011NXX		175/65R14	XL	86	T	4	50	1,168	-	5.0	5.0-6.0	7.0	23.0	9.0	460	A	A	Black	
15129NXX		175/70R14		84	T	4	44	1,102	-	5.0	4.5-6.0	7.0	23.7	9.0	460	A	A	Black	
12561NXX	P	185/60R14		82	H	4	44	1,047	-	5.5	5.0-6.5	7.4	22.8	9.0	460	A	A	Black	
15139NXX	P	185/65R14		85	T	4	44	1,124	-	5.5	5.0-6.5	7.4	23.5	9.0	460	A	A	Black	
15399NXX		185/70R14		88	T	4	44	1,235	-	5.5	4.5-6.0	7.4	24.3	9.0	460	A	A	Black	
12562NXX	P	195/60R14		85	H	4	44	1,135	-	6.0	5.5-7.0	7.9	23.2	9.0	460	A	A	Black	
15400NXX		195/70R14		91	T	4	44	1,356	-	6.0	5.0-6.5	7.9	24.8	9.0	460	A	A	Black	
15403NXX		195/75R14		92	S	4	44	1,389	-	5.5	5.0-6.5	7.7	25.5	9.0	460	A	A	White	
15404NXX		205/75R14		95	S	4	44	1,521	-	5.5	5.0-7.0	8.0	26.1	9.0	460	A	A	White	
15401NXX		215/70R14		96	T	4	44	1,565	-	6.5	5.5-7.0	8.7	25.9	9.0	460	A	A	White	
15130NXX		175/65R15		84	H	4	44	1,102	-	5.0	5.0-6.0	7.0	24.0	9.0	460	A	A	Black	
15138NXX		185/55R15		82	H	4	51	1,047	-	6.0	5.0-6.5	7.6	23.0	9.0	460	A	A	Black	
15134NXX		185/60R15		84	T	4	44	1,102	-	5.5	5.0-6.5	7.4	23.7	9.0	460	A	A	Black	
14658NXX		185/65R15		88	H	4	44	1,235	-	5.5	5.0-6.5	7.4	24.4	9.0	460	A	A	Black	
12558NXX	P	195/55R15	XL	87	V	4	50	1,201	-	6.0	5.5-7.0	7.9	23.4	9.0	460	A	A	Black	
15145NXX	P	195/60R15		87	T	4	44	1,190	-	6.0	5.5-7.0	7.9	24.2	9.0	460	A	A	Black	
15140NXX	P	195/65R15		89	T	4	44	1,279	-	6.0	5.5-7.0	7.9	25.0	10.0	460	A	A	Black	
12564NXX	P	205/60R15		90	H	4	44	1,301	-	6.0	5.5-7.5	8.2	24.7	9.0	460	A	A	Black	
15141NXX	P	205/65R15		92	T	4	44	1,400	-	6.0	5.5-7.5	8.2	25.5	9.0	460	A	A	Black	
14661NXX		205/70R15		96	T	4	44	1,565	-	6.0	5.0-7.0	8.2	26.3	9.0	460	A	A	Black	

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING 7



COMFORT 8




FUEL EFFICIENCY 6



HANDLING 7



WEAR LIFE 7



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15405NXX		205/75R15		97	S	4	44	1,609	-	5.5	5.0-7.0	8.0	27.1	9.0	460	A	A	White
15142NXX	P	215/65R15		95	T	4	44	1,510	-	6.5	6.0-7.5	8.7	26.0	9.0	460	A	A	Black
14662NXX		215/70R15		98	T	4	44	1,653	-	6.5	5.5-7.0	8.7	26.9	9.0	460	A	A	Black
15406NXX		215/75R15		100	S	4	44	1,764	-	6.0	5.5-7.0	8.5	27.7	9.0	460	A	A	White
15402NXX		225/70R15		100	T	4	44	1,764	-	6.5	6.0-7.5	9.0	27.4	9.0	460	A	A	White
15407NXX		225/75R15		102	S	4	44	1,874	-	6.0	6.0-7.5	8.8	28.3	9.0	460	A	A	White
15408NXX		235/75R15	XL	109	S	4	50	2,271	-	6.5	6.0-8.0	9.3	28.9	9.0	460	A	A	White
15148NXX	P	205/55R16		89	T	4	44	1,279	-	6.5	5.5-7.5	8.4	24.9	10.0	460	A	A	Black
15146NXX	P	205/60R16		91	T	4	44	1,356	-	6.0	5.5-7.5	8.2	25.7	9.0	460	A	A	Black
15131NXX		205/65R16		95	T	4	44	1,521	-	6.0	5.5-7.5	8.2	26.5	9.0	460	A	A	Black
15147NXX		215/60R16		95	T	4	44	1,521	-	6.5	6.0-7.5	8.7	26.1	9.0	460	A	A	Black
15143NXX		215/65R16		98	T	4	44	1,653	-	6.5	6.0-7.5	8.7	27.0	9.0	460	A	A	Black
15136NXX		225/60R16		98	T	4	44	1,653	-	6.5	6.0-8.0	9.0	26.6	9.0	460	A	A	Black
15137NXX		235/60R16		100	T	4	44	1,764	-	7.0	6.5-8.5	9.4	27.1	9.0	460	A	A	Black
15144NXX		235/65R16		103	T	4	44	1,929	-	7.0	6.5-8.5	9.4	28.0	9.0	460	A	A	Black
15152NXX		215/50R17		91	H	4	51	1,356	-	7.0	6.0-7.5	8.9	25.5	9.0	460	A	A	Black
15149NXX		215/55R17		94	H	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	460	A	A	Black
18987NXX		215/60R17		96	H	4	44	1,565	-	6.5	6.0-7.5	8.7	27.2	9.0	460	A	A	Black
15132NXX		215/65R17		99	T	4	44	1,709	-	6.5	6.0-7.5	8.7	28.0	9.0	460	A	A	Black
18986NXX		215/65R17		99	H	4	44	1,709	-	6.5	6.0-7.5	8.7	28.0	9.0	460	A	A	Black
14653NXX		225/50R17		94	V	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.0	460	A	A	Black
15153NXX		225/50R17		94	T	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.0	460	A	A	Black
15007NXX		225/55R17		97	H	4	36	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	460	A	A	Black
15150NXX		225/55R17		97	T	4	36	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	460	A	A	Black
14907NXX		225/60R17		99	H	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	9.0	460	A	A	Black
15135NXX		225/60R17		99	T	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	9.0	460	A	A	Black
15124NXX		225/65R17		102	H	4	44	1,874	-	6.5	6.0-8.0	9.0	28.5	9.0	460	A	A	Black
15151NXX		235/55R17		99	H	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.0	460	A	A	Black
14976NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	9.0	500	A	A	Black
15207NXX		225/45R18	XL	95	V	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.0	500	A	A	Black
15001NXX		225/50R18		95	V	4	51	1,521	-	7.0	6.0-8.0	9.2	26.9	9.0	500	A	A	Black
14927NXX		225/55R18		98	H	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	9.0	500	A	A	Black
15014NXX		225/60R18		100	H	4	51	1,764	-	6.5	6.0-8.0	9.0	28.6	9.0	500	A	A	Black
14908NXX		235/45R18		94	V	4	51	1,477	-	8.0	7.5-9.0	9.3	26.3	9.0	500	A	A	Black
15037NXX		235/50R18		97	H	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.0	500	A	A	Black
14910NXX		235/55R18		100	H	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	9.0	500	A	A	Black
14911NXX		235/60R18	XL	107	H	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	9.0	500	A	A	Black
14941NXX		235/65R18		106	H	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	9.0	500	A	A	Black
15038NXX		245/45R18	XL	100	V	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.0	500	A	A	Black
14904NXX		245/60R18		105	H	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	9.0	500	A	A	Black
14938NXX		225/55R19		99	H	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	9.0	500	A	A	Black
15206NXX		235/40R19	XL	96	V	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.0	500	A	A	Black
15044NXX		235/45R19		95	H	4	51	1,521	-	8.0	7.5-9.0	9.3	27.4	9.0	500	A	A	Black
15079NXX		235/50R19		99	H	4	51	1,709	-	7.5	6.5-8.5	9.6	28.3	9.0	500	A	A	Black
14971NXX		235/55R19		101	H	4	51	1,819	-	7.5	6.5-8.5	9.6	29.2	9.0	500	A	A	Black
15043NXX		235/55R20		102	H	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	9.0	500	A	A	Black
15219NXX		245/50R20		102	H	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	9.0	500	A	A	Black
15010NXX		255/50R20		105	H	4	51	2,039	-	8.0	7.0-9.0	10.4	30.1	9.0	500	A	A	Black
14985NXX		255/55R20		107	H	4	51	2,149	-	8.0	7.0-9.0	10.4	31.0	9.0	500	A	A	Black

Technical data can be changed without further notice.
White: White Ribbon Type (0.6" width)

SB-802

STANDARD TOURING ALL SEASON



36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
11766NXX		165/80R15		87	T	4	36	1,201	-	4.5	4.0-5.5	6.5	25.4	10.0	320	A	B	Black

Technical data can be changed without further notice.

NEXEN NEXEN TIRE



OFFICIAL TIRE PARTNERS OF THE NEW YORK RANGERS



We are thrilled to have the partnership between Nexen Tire and the New York Rangers. It is an incredibly exciting opportunity to join forces with an iconic team like the New York Rangers. We look forward to engaging with the community and the team's passionate fan base."

- Brian Yoonseok Han, CEO of Nexen Tire America, Inc.

ROADIAN HP

STREET SPORT TRUCK ALL SEASON

The Roadian HP includes a V-shaped directional pattern design, which provides high-performance grip on any road surface. This tire also features a five random pitch variation design that reduces pattern noise, and wide and deep directional grooves to provide excellent drainage and braking performance, while the large shoulder blocks maximize cornering grip.



FIRST 2/32" OR 1 YEAR

36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
11006NXK		255/60R17		106	V	4	44	2,094	-	7.5	7.0-9.0	10.2	29.1	11.0	460	A	A	Black
15451NXK		265/60R17		108	V	4	44	2,205	-	8.0	7.5-9.5	10.7	29.5	11.0	460	A	A	Black
15453NXK		275/60R17		110	V	4	44	2,337	-	8.0	7.5-9.5	11.0	30.0	11.0	460	A	A	Black
15608NXK		265/60R18		110	H	4	44	2,337	-	8.0	7.5-9.5	10.7	30.5	11.0	460	A	A	Black
15455NXK		285/60R18		116	V	4	44	2,756	-	8.5	8.0-10.0	11.5	31.5	11.0	460	A	A	Black
15467NXK		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	11.0	460	A	A	Black
15469NXK		265/50R20	XL	111	V	4	50	2,403	-	8.5	7.5-9.5	10.9	30.5	11.0	460	A	A	Black
15470NXK		275/40R20	XL	106	V	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	11.0	460	A	A	Black
15454NXK		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	11.0	460	A	A	Black
15471NXK		275/55R20	XL	117	V	4	50	2,833	-	8.5	7.5-9.5	11.2	31.9	11.0	460	A	A	Black
15473NXK		285/50R20	XL	116	V	4	50	2,756	-	9.0	8.0-10.0	11.7	31.3	11.0	460	A	A	Black
15463NXK		295/40R20		106	V	4	44	2,094	-	10.5	10.0-11.5	11.9	29.3	11.0	460	A	A	Black
15459NXK		295/45R20	XL	114	V	4	50	2,601	-	10.0	9.5-11.0	11.7	30.5	11.0	460	A	A	Black
15464NXK		255/30R22	XL	95	V	4	50	1,521	-	9.0	8.5-9.5	10.2	28.1	11.0	460	A	A	Black
15456NXK		265/35R22	XL	102	V	4	50	1,874	-	9.5	9.0-10.5	10.7	29.3	11.0	460	A	A	Black
15472NXK		285/35R22	XL	106	V	4	50	2,094	-	10.0	9.5-11.0	11.4	29.9	11.0	460	A	A	Black
15466NXK		285/45R22	XL	114	V	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	11.0	460	A	A	Black
15457NXK		295/30R22	XL	103	V	4	50	1,929	-	10.5	10.0-11.0	11.9	29.0	11.0	460	A	A	Black
15460NXK		305/40R22	XL	114	V	4	50	2,601	-	11.0	10.0-12.0	12.3	31.6	11.0	460	A	A	Black
15452NXK		305/45R22	XL	118	V	4	50	2,910	-	10.0	9.5-11.5	11.9	32.8	11.0	460	A	A	Black
15474NXK		295/35R24	XL	110	V	4	50	2,337	-	10.5	10.0-11.5	11.9	32.1	11.0	460	A	A	Black
15354NXK		305/35R24	XL	112	V	4	50	2,469	-	11.0	10.0-12.0	12.3	32.4	11.0	460	A	A	Black

Technical data can be changed without further notice.

PERFORMANCE RATINGS



BRAKING 8



COMFORT 7



FUEL EFFICIENCY 8



HANDLING 9



WEAR LIFE 8

ROADIAN GTX

CUV/SUV TOURING

The Roadian GTX delivers on every count. Crossovers and SUVs are more popular than ever, and their segment of the market is only increasing. Drivers count on their versatility and dependability, from cross-country road trips to trips to the store. They need a tire with a long tread life, all-season traction, the best mileage, and a comfortable ride. The Nexen Roadian GTX touring tire meets these needs and exceeds expectations.



FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

OE FITMENT ON



NEW

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
17063NXK		205/70R16		97	H	4	51	1,609	-	6.0	5.0-7.0	8.2	27.3	9.5	680	A	A	Black	
17058NXK		215/65R16		98	V	4	51	1,653	-	6.5	6.0-7.5	8.7	27.0	9.5	680	A	A	Black	
17064NXK		215/70R16		100	H	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	9.5	680	A	A	Black	
17065NXK		235/70R16		106	H	4	51	2,094	-	7.0	6.0-8.0	9.4	29.0	9.5	680	A	A	Black	
17050NXK		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	9.5	680	A	A	Black	
17076NXK		215/65R17		99	H	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	9.5	600	A	A	Black	
14084NXK		225/60R17		99	H	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	9.5	680	A	A	Black	
17060NXK		225/65R17		102	V	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	9.5	680	A	A	Black	
15639NXK		225/65R17		102	T	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	9.5	600	A	A	Black	Jeep
17044NXK		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.5	680	A	A	Black	
17054NXK		235/60R17		102	H	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	9.5	680	A	A	Black	
16581NXK		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	9.5	600	A	A	Black	Hyundai
17136NXK		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	9.5	600	A	A	Black	Kia
17061NXK		245/65R17		107	V	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	9.5	680	A	A	Black	
17041NXK		215/55R18	XL	99	V	4	50	1,709	-	7.0	6.0-7.5	8.9	27.3	9.5	680	A	A	Black	
14120NXK		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	9.5	680	A	A	Black	
15604NXK		225/60R18		100	T	4	51	1,764	-	6.5	6.0-8.0	9.1	28.5	9.5	580	A	A	Black	Jeep
15519NXK		225/60R18		100	T	4	51	1,764	-	6.5	6.0-8.0	9.1	28.5	10.0	500	A	A	Black	Jeep

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING 8



COMFORT 10



FUEL EFFICIENCY 9



HANDLING 10



WEAR LIFE 10



SNOW TRACTION 6

ROADIAN GTX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
17052NXX		225/60R18	XL	104	H	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	9.5	680	A	A	Black	
17036NXX		235/50R18		97	V	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.5	680	A	A	Black	
14081NXX		235/55R18	XL	104	V	4	50	1,984	-	7.5	6.5-8.5	9.6	28.1	9.5	680	A	A	Black	
10398NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	9.5	680	A	A	Black	
10281NXX		235/60R18		103	H	4	51	1,929	-	7.0	6.5-8.5	9.4	29.1	9.5	600	A	A	Black	Hyundai
10408NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	9.5	600	A	A	Black	
10416NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	9.5	680	A	A	Black	
17048NXX		255/55R18	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	9.5	680	A	A	Black	
17056NXX		255/60R18		108	H	4	51	2,205	-	7.5	7.0-9.0	10.2	30.0	9.5	680	A	A	Black	
10400NXX		255/65R18		111	H	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	9.5	680	A	A	Black	
17057NXX		265/60R18		110	H	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	9.5	680	A	A	Black	
17043NXX		225/55R19	XL	103	V	4	50	1,929	-	7.0	6.0-8.0	9.2	28.8	9.5	680	A	A	Black	
17033NXX		235/45R19		95	H	4	51	1,521	-	8.0	7.5-9.0	9.3	27.4	9.5	680	A	A	Black	
10405NXX		235/50R19		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	28.3	9.5	680	A	A	Black	
16583NXX		235/55R19		101	H	4	51	1,819	-	7.5	6.5-8.5	9.6	29.2	9.5	680	A	A	Black	
15506NXX		235/55R19	XL	105	V	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	9.5	680	A	A	Black	
19812NXX		235/60R19	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	30.1	9.5	680	A	A	Black	
17034NXX		245/45R19	XL	102	V	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	9.5	680	A	A	Black	
10403NXX		245/50R19	XL	105	W	4	50	2,039	-	7.5	7.0-8.5	10.0	28.7	9.5	680	A	A	Black	
17047NXX		245/55R19		103	V	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	9.5	680	A	A	Black	
17407NXX		255/50R19	XL	107	H	4	50	2,149	-	8.0	7.0-9.0	10.4	29.1	9.5	680	A	A	Black	
17414NXX		255/55R19	XL	111	V	4	50	2,403	-	8.0	7.0-9.0	10.4	30.0	9.5	680	A	A	Black	
17566NXX		255/60R19		109	H	4	51	2,271	-	7.5	7.0-9.0	10.2	31.1	9.5	680	A	A	Black	
15221NXX		265/55R19	XL	113	W	4	50	2,535	-	8.5	7.5-9.5	10.9	30.5	9.5	680	A	A	Black	
17413NXX		275/55R19		111	V	4	51	2,403	-	8.5	7.5-9.5	11.2	30.9	9.5	680	A	A	Black	
19805NXX		235/50R20	XL	104	W	4	50	1,984	-	7.5	6.5-8.5	9.6	29.3	9.5	680	A	A	Black	
14156NXX		235/55R20		102	V	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	9.5	680	A	A	Black	
17035NXX		245/45R20	XL	103	V	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.5	680	A	A	Black	
14079NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	9.5	680	A	A	Black	
19024NXX		255/40R20	XL	101	W	4	50	1,819	-	9.0	8.5-10.0	10.2	29.0	9.5	680	A	A	Black	
16640NXX	P	255/45R20		101	W	4	51	1,819	-	8.5	8.0-9.5	10.0	29.1	9.5	600	A	A	Black	Mitsubishi
17001NXX	P	255/45R20		101	W	4	51	1,819	-	8.5	8.0-9.5	10.0	29.1	9.5	680	A	A	Black	Mitsubishi
19456NXX		255/45R20	XL	105	W	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	9.5	600	A	A	Black	Mitsubishi
17039NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	9.5	680	A	A	Black	
18071NXX		255/50R20		105	T	4	51	2,039	-	8.0	7.0-9.0	10.4	30.1	9.5	680	A	A	Black	Volkswagen
10406NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	9.5	680	A	A	Black	
10404NXX		265/45R20	XL	108	V	4	50	2,205	-	9.0	8.5-10.0	10.5	29.4	9.5	680	A	A	Black	
17040NXX		265/50R20	XL	111	V	4	50	2,403	-	8.5	7.5-9.5	10.9	30.5	9.5	680	A	A	Black	
17406NXX		275/40R20	XL	106	W	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	9.5	680	A	A	Black	
17408NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	9.5	680	A	A	Black	
10407NXX		275/50R20	XL	113	W	4	50	2,535	-	8.5	7.5-9.5	11.2	30.9	9.5	680	A	A	Black	
17409NXX		275/55R20		113	H	4	51	2,535	-	8.5	7.5-9.5	11.2	31.9	9.5	680	A	A	Black	
10382NXX		285/50R20		112	V	4	51	2,469	-	9.0	8.0-10.0	11.2	31.2	9.5	680	A	A	Black	
1A070NXX		235/50R21		101	W	4	51	1,819	-	7.5	6.5-8.5	9.6	30.3	9.5	680	A	A	Black	
19023NXX		265/40R21	XL	105	V	4	50	2,039	-	9.5	9.0-10.5	10.4	29.3	9.5	680	A	A	Black	
19026NXX		265/45R21	XL	108	W	4	50	2,205	-	9.0	8.5-10.0	10.5	30.4	9.5	680	A	A	Black	
19032NXX		275/40R21	XL	107	V	4	50	2,149	-	9.5	9.0-11.0	10.9	29.7	9.5	680	A	A	Black	
19030NXX		275/45R21	XL	110	W	4	50	2,337	-	9.0	8.5-10.5	10.7	30.7	9.5	680	A	A	Black	
15225NXX		265/40R22	XL	106	W	4	50	2,094	-	9.5	9.0-10.5	10.7	30.4	9.5	680	A	A	Black	
10436NXX		275/40R22	XL	108	V	4	50	2,205	-	9.5	9.0-11.0	10.9	30.7	9.5	680	A	A	Black	
15495NXX		275/45R22	XL	112	W	4	50	2,469	-	9.0	8.5-10.5	10.7	31.8	9.5	680	A	A	Black	
10383NXX		275/50R22		111	H	4	51	2,403	-	8.5	7.5-9.5	10.8	32.8	9.5	680	A	A	Black	
17412NXX		285/45R22	RF	114	H	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	9.5	680	A	A	Black	

Technical data can be changed without further notice.
For more detailed OE application information, please refer to "Original Equipment 2026" page.

ROADIAN HTX2

HIGHWAY TERRAIN

Designed for the long-inspired journey to create a high-mileage SUV and Light Truck tire that also delivers outstanding all-weather driving performance. Designed, engineered, and constructed with technical features only found in the Roadian HTX2, compromise is no longer a part of your tire-buying equation.



(P)

(LT)

FIRST 2/32" OR 1 YEAR

36 MONTHS

60 DAYS OR 1,000 MILES

No Road Hazard & Mileage Warranty on commercial delivery van sizes (LT225/75R16 & 235/65R16C). Warranty limited to manufacture defects only.

OE FITMENT ON Jeep

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
17990NXX		225/70R16		103	T	4	51	1,929	-	6.5	6.0-7.5	9.0	28.4	11.0	700	A	B	White	
17984NXX		225/75R16	XL	108	T	4	50	2,205	-	6.0	6.0-7.5	8.8	29.3	11.0	700	A	B	White	
17980NXX		235/70R16	XL	109	T	4	50	2,271	-	7.0	6.0-8.0	9.4	29.0	11.0	700	A	B	White	
17976NXX		235/75R16		108	T	4	51	2,205	-	6.5	6.0-8.0	9.3	29.8	11.0	700	A	B	White	
17977NXX		245/70R16		107	T	4	51	2,149	-	7.0	6.5-8.0	9.8	29.5	11.0	700	A	B	White	
17988NXX		245/75R16		111	T	4	51	2,403	-	7.0	6.5-8.0	9.8	30.5	11.0	700	A	B	White	
17993NXX		255/65R16		109	T	4	51	2,271	-	7.5	7.0-9.0	10.2	29.1	11.0	700	A	B	White	
17992NXX		255/70R16		111	T	4	51	2,403	-	7.5	6.5-8.5	10.2	30.1	11.0	700	A	B	White	
17989NXX		265/70R16		112	T	4	51	2,469	-	8.0	7.0-9.0	10.7	30.6	12.0	700	A	B	White	
17978NXX		265/75R16		116	T	4	51	2,756	-	7.5	7.0-9.0	10.5	31.7	12.0	700	A	B	White	
17970NXX		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	11.0	700	A	A	Black	
17960NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	11.0	700	A	A	Black	
17982NXX		245/65R17		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	11.0	700	A	B	White	
17983NXX		245/70R17		110	T	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	11.0	700	A	B	White	
11717NXX		245/75R17		112	S	4	51	2,469	-	7.0	6.5-7.5	9.8	31.5	11.0	700	A	A	Black	Jeep
17991NXX		255/65R17		110	T	4	51	2,337	-	7.5	7.0-9.0	10.2	30.1	11.0	700	A	B	White	

ROADIAN HTX2

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
17994NXX		255/70R17		112	T	4	51	2,469	-	7.5	6.5-8.5	10.2	31.1	11.0	700	A	B	White	
17987NXX		265/65R17		112	T	4	51	2,469	-	8.0	7.5-9.5	10.7	30.6	12.0	700	A	B	White	
17103NXX		265/70R17		115	T	4	51	2,679	-	8.0	7.0-9.0	10.7	31.7	12.0	700	A	B	White	
17955NXX		235/60R18		103	H	4	51	1,929	-	7.0	6.5-8.5	9.4	29.1	11.0	700	A	A	Black	
17963NXX		235/65R18		106	H	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	11.0	700	A	A	Black	
17966NXX		245/60R18		105	H	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	11.0	700	A	A	Black	
17949NXX		255/65R18		111	T	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	11.0	700	A	A	Black	
17975NXX		255/70R18		113	T	4	51	2,535	-	7.5	6.5-8.5	10.2	32.1	11.0	700	A	A	Black	
17962NXX		265/60R18		110	H	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	12.0	700	A	A	Black	
17967NXX		265/65R18		114	T	4	51	2,601	-	8.0	7.5-9.5	10.7	31.5	12.0	700	A	A	Black	
17968NXX		265/70R18		116	T	4	51	2,756	-	8.0	7.0-9.0	10.7	32.6	12.0	700	A	A	Black	
17972NXX		275/65R18		116	T	4	51	2,756	-	8.0	7.5-9.5	11.0	32.1	12.0	700	A	A	Black	
17965NXX		245/55R19		103	T	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	11.0	700	A	A	Black	
17956NXX		255/60R19		109	H	4	51	2,271	-	7.5	7.0-9.0	10.2	31.1	11.0	700	A	A	Black	
17974NXX		245/60R20		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	31.6	11.0	700	A	A	Black	
17948NXX		255/50R20		105	H	4	51	2,039	-	8.0	7.0-9.0	10.4	30.1	11.0	700	A	A	Black	
17969NXX		255/55R20		107	H	4	51	2,149	-	8.0	7.0-9.0	10.4	31.0	11.0	700	A	A	Black	
11696NXX		255/60R20	XL	113	T	4	50	2,535	-	7.5	7.0-9.0	10.0	32.0	11.0	700	A	A	Black	Jeep
17950NXX		265/50R20		107	T	4	51	2,149	-	8.5	7.5-9.5	10.9	30.5	12.0	700	A	A	Black	
19194NXX		265/60R20		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	32.5	12.0	700	A	A	Black	
17964NXX		275/55R20		113	H	4	51	2,535	-	8.5	7.5-9.5	11.2	31.9	12.0	700	A	A	Black	
17957NXX		275/60R20		115	H	4	51	2,679	-	8.0	7.5-9.5	11.0	33.0	12.0	700	A	A	Black	
17973NXX		285/45R22	XL	114	H	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	11.0	700	A	A	Black	
17954NXX	LT	215/85R16		115/112	R	10	80	2,680	2,470	6.0	5.5-7.0	8.5	30.4	14.5	-	-	-	Black	
17417NXX	LT	225/75R16		115/112	R	10	80	2,680	2,470	6.0	6.0-7.5	8.8	29.3	14.5	-	-	-	Black	
18064NXX		235/65R16C		121/119	R	10	83	3,197	2,998	7.0	6.5-7.5	9.4	28.0	12.5	-	-	-	Black	
17958NXX	LT	235/85R16		120/116	S	10	80	3,042	2,778	6.5	6.0-7.5	9.3	31.7	14.5	-	-	-	Black	
17959NXX	LT	245/75R16		120/116	S	10	80	3,042	2,778	7.0	6.5-8.0	9.8	30.5	14.5	-	-	-	Black	
17981NXX	LT	265/75R16		123/120	S	10	80	3,415	3,085	7.5	7.0-9.0	10.5	31.7	14.5	-	-	-	White	
17971NXX	LT	235/80R17		120/117	S	10	80	3,085	2,835	6.5	6.0-8.0	9.3	31.8	14.5	-	-	-	Black	
17985NXX	LT	245/70R17		119/116	S	10	80	3,000	2,755	7.0	6.5-8.0	9.8	30.6	14.5	-	-	-	White	
17986NXX	LT	245/75R17		121/118	S	10	80	3,195	2,910	7.0	6.5-8.0	9.8	31.5	14.5	-	-	-	White	
18830NXX	LT	265/70R17		123/120	S	10	80	3,415	3,085	8.0	7.0-9.0	10.7	31.7	14.5	-	-	-	White	
17953NXX	LT	275/65R18		123/120	S	10	80	3,415	3,085	8.0	8.0-9.5	11.0	32.1	14.5	-	-	-	Black	
17951NXX	LT	275/70R18		125/122	S	10	80	3,640	3,305	8.0	7.0-9.0	11.0	33.2	14.5	-	-	-	Black	
17961NXX	LT	265/60R20		121/118	S	10	80	3,195	2,910	8.0	8.0-9.5	10.7	32.5	14.5	-	-	-	Black	
17947NXX	LT	275/65R20		126/123	S	10	80	3,750	3,415	8.0	8.0-9.5	11.0	34.1	14.5	-	-	-	Black	
17952NXX	LT	285/60R20		125/122	S	10	80	3,640	3,305	8.5	8.5-10.0	11.5	33.5	14.5	-	-	-	Black	

Technical data can be changed without further notice.
For more detailed OE application information, please refer to "Original Equipment 2026" page.

DUAL SIDEWALL OPTIONS ▼

WHITE SIDEWALL OPTION ▼



ROADIAN ATX

ALL-TERRAIN

Designed for durability and all-around grip performance in any road condition with heavy-duty construction and materials. New tread technology provides a better grip as it wears, and sidewall lugs and deep grooves produce outstanding handling and control off-road and on-road. Mount a set on your CUV, SUV, or Light Truck to experience Nexen's unwavering commitment to do it all, and do it well. Dry or wet, muddy and slippery... go where you want in confidence with the Nexen Roadian ATX.



(P)



(LT)



FIRST 2/32" OR 1 YEAR



36 MONTHS



60 DAYS OR 1,000 MILES



OE FITMENT ON Jeep

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
18788NXX		235/75R15	XL	109	T	4	50	2,271	-	6.5	6.0-8.0	9.3	28.9	12.5	600	A	B	Black	
10488NXX		205/70R16		97	H	4	51	1,609	-	6.0	5.0-7.0	8.2	27.3	12.5	600	A	B	Black	
10483NXX		215/65R16	XL	102	H	4	50	1,874	-	6.5	6.0-7.5	8.7	27.0	12.5	600	A	B	Black	
10525NXX		215/70R16		100	H	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	12.5	600	A	B	Black	
18783NXX		245/75R16		111	T	4	51	2,403	-	7.0	6.5-8.0	9.8	30.5	12.5	600	A	B	Black	
18785NXX		265/70R16		112	T	4	51	2,469	-	8.0	7.0-9.0	10.7	30.6	12.5	600	A	B	Black	
18784NXX		265/75R16		116	T	4	51	2,756	-	7.5	7.0-9.0	10.5	31.7	12.5	600	A	B	Black	
10620NXX		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	12.5	600	A	B	Black	
10446NXX		215/65R17	XL	103	H	4	50	1,929	-	6.5	6.0-7.5	8.7	28.0	12.5	600	A	B	Black	
10448NXX		225/55R17	XL	101	V	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	12.5	600	A	B	Black	
10456NXX		225/60R17		99	V	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	12.5	600	A	B	Black	
10459NXX		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	12.5	600	A	B	Black	
10487NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	12.5	600	A	B	Black	
18771NXX		235/75R17		109	T	4	51	2,271	-	6.5	6.0-8.0	9.3	30.9	12.5	600	A	B	Black	
18776NXX		245/65R17	XL	111	T	4	50	2,403	-	7.0	7.0-8.5	9.8	29.5	12.5	600	A	B	Black	
18764NXX		245/70R17		110	T	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	12.5	600	A	B	Black	

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
9



COMFORT
7



FUEL EFFICIENCY
8



OFF ROAD
9



WEAR LIFE
9



3 Peak Mountain
Snowflake Certified
(except OEM &
flotation sizes)

ROADIAN ATX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
11702NXX		245/75R17		112	S	4	51	2,469	-	7.0	6.5-7.5	9.8	31.5	11.5	560	A	A	Black	Jeep
18768NXX		255/65R17		110	T	4	51	2,337	-	7.5	7.0-9.0	10.2	30.1	12.5	600	A	B	Black	
18769NXX		255/70R17		112	T	4	51	2,469	-	7.5	6.5-8.5	10.2	31.1	12.5	600	A	B	Black	
18763NXX		255/75R17		115	T	4	51	2,679	-	7.0	6.5-8.5	10.0	32.0	12.5	600	A	B	Black	
18765NXX		265/65R17	XL	116	T	4	50	2,756	-	8.0	7.5-9.5	10.7	30.6	12.5	600	A	B	Black	
17609NXX		265/70R17		115	T	4	51	2,679	-	8.0	7.0-9.0	10.7	31.7	12.5	600	A	B	Black	
18760NXX	P	285/70R17		117	T	4	51	2,833	-	8.5	7.5-9.5	11.5	32.8	12.5	600	A	B	Black	
10494NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	12.5	600	A	B	Black	
10490NXX		225/60R18	XL	104	H	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	12.5	600	A	B	Black	
10486NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	12.5	600	A	B	Black	
10571NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	12.5	600	A	B	Black	
10484NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	12.5	600	A	B	Black	
18757NXX		255/70R18		113	T	4	51	2,535	-	7.5	6.5-8.5	10.2	32.1	12.5	600	A	B	Black	
18756NXX		265/60R18		110	T	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	12.5	600	A	B	Black	
18755NXX		265/65R18		114	T	4	51	2,601	-	8.0	7.5-9.5	10.7	31.5	12.5	600	A	B	Black	
18750NXX		265/70R18		116	T	4	51	2,756	-	8.0	7.0-9.0	10.7	32.6	12.5	600	A	B	Black	
18041NXX		265/70R18		116	T	4	51	2,756	-	8.0	7.0-9.0	10.7	32.6	11.5	580	A	B	Black	Jeep
18748NXX		275/65R18		116	T	4	51	2,756	-	8.0	7.5-9.5	11.0	32.1	12.5	600	A	B	Black	
10557NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	12.5	600	A	B	Black	
18732NXX		245/60R20		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	31.6	12.5	600	A	B	Black	
10555NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	12.5	600	A	B	Black	
10543NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	12.5	600	A	B	Black	
18747NXX		265/50R20	XL	111	T	4	50	2,403	-	8.5	7.5-9.5	10.9	30.5	12.5	600	A	B	Black	
19193NXX		265/60R20		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	32.5	12.5	600	A	B	Black	
18730NXX		275/55R20	XL	117	T	4	50	2,833	-	8.5	7.5-9.5	11.2	31.9	12.5	600	A	B	Black	
18736NXX		275/60R20		115	T	4	51	2,679	-	8.0	7.5-9.5	11.0	33.0	12.5	600	A	B	Black	
18737NXX		275/50R22		111	H	4	51	2,403	-	8.5	7.5-9.5	11.2	32.9	12.5	600	A	B	Black	
18735NXX		285/45R22	XL	114	H	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	12.0	600	A	B	Black	
18746NXX		305/45R22	XL	118	H	4	50	2,910	-	10.0	9.5-11.5	11.9	32.8	12.0	600	A	B	Black	
12500NXX	LT	235/75R15		104/101	S	6	50	1,985	1,820	6.5	6.0-8.0	9.3	28.9	16.0	-	-	-	Black	
* 18777NXX	LT	225/75R16		115/112	S	10	80	2,680	2,470	6.0	6.0-7.5	8.8	29.3	16.0	-	-	-	Black	
* 18786NXX	LT	235/85R16		120/116	S	10	80	3,042	2,778	6.5	6.5-7.5	9.3	31.7	16.0	-	-	-	Black	
* 18782NXX	LT	245/75R16		120/116	S	10	80	3,042	2,778	7.0	6.5-8.0	9.8	30.5	16.0	-	-	-	Black	
* 18780NXX	LT	265/70R16		121/118	S	10	80	3,195	2,910	8.0	7.0-9.0	10.7	30.6	16.0	-	-	-	Black	
* 18789NXX	LT	265/75R16		123/120	S	10	80	3,415	3,085	7.5	7.0-9.0	10.5	31.7	16.0	-	-	-	Black	
* 18790NXX	LT	285/75R16		126/123	S	10	80	3,750	3,415	8.0	7.5-9.5	11.3	32.8	16.0	-	-	-	Black	
* 18774NXX	LT	235/80R17		120/117	S	10	80	3,085	2,835	6.5	6.0-8.0	9.3	31.8	16.0	-	-	-	Black	
* 18762NXX	LT	245/70R17		119/116	S	10	80	3,000	2,755	7.0	6.5-8.0	9.8	30.6	16.0	-	-	-	Black	
* 18770NXX	LT	245/75R17		121/118	S	10	80	3,195	2,910	7.0	6.5-8.0	9.8	31.5	16.0	-	-	-	Black	
11700NXX	LT	255/75R17		111/108	Q	6	50	2,405	2,205	7.0	6.5-8.5	10.0	32.3	15.0	-	-	-	Black	Jeep
* 14259NXX	LT	265/65R17		120/117	T	10	80	3,085	2,835	8.0	7.5-9.5	10.7	30.6	16.0	-	-	-	Black	
* 18773NXX	LT	265/70R17		123/120	S	10	80	3,415	3,085	8.0	7.0-9.0	10.7	31.7	16.0	-	-	-	Black	
* 18775NXX	LT	275/70R17		124/121	S	10	80	3,525	3,195	8.0	7.0-9.0	11.0	32.2	16.0	-	-	-	Black	
* 18767NXX	LT	285/70R17		126/123	S	10	80	3,750	3,415	8.5	7.0-9.5	11.5	32.8	16.0	-	-	-	Black	
* 18772NXX	LT	285/75R17		128/125	S	10	80	3,970	3,640	8.0	7.5-9.5	11.3	33.9	16.0	-	-	-	Black	
* 18766NXX	LT	315/70R17		126/123	S	10	65	3,750	3,415	9.5	8.0-10.5	12.7	34.4	16.0	-	-	-	Black	
* 18758NXX	LT	265/65R18		122/119	S	10	80	3,305	3,000	8.0	8.0-9.5	10.7	31.5	16.0	-	-	-	Black	
* 18752NXX / 1A320NXX	LT	265/70R18		124/121	S	10	80	3,525	3,195	8.0	7.0-9.0	10.7	32.6	16.0	-	-	-	Black	
* 18751NXX / 1A315NXX	LT	275/65R18		123/120	S	10	80	3,415	3,085	8.0	8.0-9.5	11.0	32.1	16.0	-	-	-	Black	
* 18390NXX / 1A317NXX	LT	275/70R18		125/122	S	10	80	3,640	3,305	8.0	7.0-9.0	11.0	33.2	16.0	-	-	-	Black	

CONTINUED ON NEXT PAGE...

ROADIAN ATX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
* 18753NXX / 1A314NXX	LT	285/65R18		125/122	S	10	80	3,640	3,305	8.5	8.5-10.0	11.5	32.6	16.0	-	-	-	Black	
* 18749NXX	LT	285/75R18		129/126	S	10	80	4,080	3,750	8.0	7.5-9.5	11.3	34.8	16.0	-	-	-	Black	
* 18754NXX	LT	295/70R18		129/126	S	10	80	4,080	3,750	8.5	7.5-10.0	11.8	34.3	16.0	-	-	-	Black	
* 18738NXX / 1A318NXX	LT	265/60R20		121/118	S	10	80	3,195	2,910	8.0	8.0-9.5	10.7	32.5	16.0	-	-	-	Black	
* 18745NXX / 1A316NXX	LT	275/55R20		120/117	S	10	80	3,085	2,835	8.5	8.0-9.5	11.2	31.9	16.0	-	-	-	Black	
* 18734NXX / 1A322NXX	LT	275/60R20		123/120	S	10	80	3,415	3,085	8.0	8.0-9.5	11.0	33.0	16.0	-	-	-	Black	
* 18740NXX / 1A321NXX	LT	275/65R20		126/123	S	10	80	3,750	3,415	8.0	8.0-9.5	11.0	34.1	16.0	-	-	-	Black	
* 18739NXX / 1A324NXX	LT	285/55R20		122/119	S	10	80	3,305	3,000	9.0	8.5-10.5	11.7	32.4	16.0	-	-	-	Black	
* 18743NXX / 1A323NXX	LT	285/60R20		125/122	S	10	80	3,640	3,305	8.5	8.5-10.0	11.5	33.5	16.0	-	-	-	Black	
* 19027NXX	LT	285/65R20		127/124	S	10	80	3,860	3,525	8.5	8.5-10.0	11.5	34.6	16.0	-	-	-	Black	
* 19031NXX	LT	295/65R20		129/126	S	10	80	4,080	3,750	8.5	8.5-10.5	11.7	35.1	16.0	-	-	-	Black	
* 18741NXX / 1A325NXX	LT	305/55R20		125/122	S	12	80	3,640	3,305	9.5	9.0-11.0	12.4	33.2	16.0	-	-	-	Black	
* 18787NXX		30X9.50R15		104	S	6	50	1,985	-	7.5	6.0-8.0	9.4	29.5	16.0	-	-	-	Black	
* 18778NXX		31X10.50R15		109	S	6	50	2,270	-	8.5	7.0-9.0	10.6	30.5	16.0	-	-	-	Black	
* 18781NXX		33X12.50R15		108	S	6	35	2,205	-	10.0	8.0-10.5	12.5	32.5	16.0	-	-	-	Black	
* 18761NXX		35X12.50R17		128	S	12	80	3,970	-	10.0	8.0-10.5	12.5	34.5	16.0	-	-	-	Black	
* 19829NXX		37x12.50R17		128	S	10	80	3,970	-	10.0	8.5-11.0	12.5	36.8	16.0	-	-	-	Black	
* 18759NXX		35X12.50R18		128	S	12	80	3,970	-	10.0	8.5-11.0	12.5	34.5	16.0	-	-	-	Black	
* 18733NXX		33X12.50R20		119	S	12	80	3,000	-	10.0	8.5-11.0	12.5	32.5	16.0	-	-	-	Black	
* 18742NXX / 1A319NXX		35X12.50R20		125	S	12	80	3,640	-	10.0	8.5-11.0	12.5	34.5	16.0	-	-	-	Black	
* 18744NXX / 1A326NXX		33X12.50R22		114	S	12	80	2,600	-	10.0	8.0-11.0	12.5	32.5	16.0	-	-	-	Black	
* 18731NXX		35X12.50R22		121	S	12	80	3,195	-	10.0	8.5-11.0	12.5	34.5	16.0	-	-	-	Black	

ROADIAN MTX

MUD TERRAIN

The Roadian MTX features an aggressive design that is extremely versatile for on- and off-road driving. Each tire boasts a dual-sidewall design that allows you to customize the look of the tire on your vehicle. The Roadian MTX also features a standard 3-ply design and F-Load weight rating that makes it extremely capable for heavy hauling. With such rugged traits, you wouldn’t expect the Roadian MTX to be as quiet as it is on the highway, but thanks to its patented tread block design, the road noise has been minimized.



36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
17450NXK	LT	235/85R16		120/116	Q	10	80	3,042	2,778	6.5	6.0-7.5	9.3	31.7	19.0	-	-	-	Black
15873NXK	LT	265/75R16		123/120	Q	10	80	3,415	3,085	7.5	7.0-8.0	10.5	31.9	19.0	-	-	-	Black
15879NXK	LT	285/75R16		126/123	Q	10	80	3,750	3,415	8.0	7.5-9.0	11.3	33.1	19.0	-	-	-	Black
15883NXK	LT	235/80R17		120/117	Q	10	80	3,085	2,835	6.5	6.0-7.5	9.3	32.0	18.0	-	-	-	Black
15884NXK	LT	245/75R17		121/118	Q	10	80	3,195	2,910	7.0	6.5-7.5	9.8	31.7	18.0	-	-	-	Black
15886NXK	LT	255/75R17		111/108	Q	6	50	2,405	2,205	7.0	6.5-8.5	10.0	32.3	18.0	-	-	-	Black
18937NXK	LT	265/70R17		123/120	Q	10	80	3,415	3,085	8.0	7.0-8.5	10.7	31.9	19.0	-	-	-	Black
18941NXK	LT	285/70R17		126/123	Q	10	80	3,750	3,415	8.5	7.5-9.0	11.5	33.0	19.0	-	-	-	Black
18940NXK	LT	295/70R17		128/125	Q	10	80	3,970	3,640	8.5	7.5-10.0	11.8	33.5	20.0	-	-	-	Black
18944NXK	LT	305/65R17		128/125	Q	12	80	3,970	3,640	9.0	8.5-11.0	12.2	32.8	20.0	-	-	-	Black
18939NXK	LT	315/70R17		128/125	Q	12	80	3,970	3,640	9.5	8.0-11.0	12.7	34.6	20.0	-	-	-	Black
15925NXK	LT	275/65R18		123/120	Q	10	80	3,415	3,085	8.0	7.5-9.0	11.0	32.3	19.0	-	-	-	Black
15897NXK	LT	275/70R18		125/122	Q	10	80	3,640	3,305	8.0	7.0-8.5	11.0	33.4	19.0	-	-	-	Black
15926NXK	LT	285/65R18		125/122	Q	10	80	3,640	3,305	8.5	8.0-10.0	11.5	32.8	19.0	-	-	-	Black
15898NXK	LT	295/70R18		129/126	Q	10	80	4,080	3,750	8.5	7.5-10.0	11.8	34.5	20.0	-	-	-	Black
16400NXK	LT	305/70R18		128/125	Q	12	80	3,970	3,640	9.0	8.5-10.0	12.2	35.1	20.0	-	-	-	Black

CONTINUED ON NEXT PAGE...

ROADIAN MTX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
15929NXK	LT	275/65R20		126/123	Q	10	80	3,750	3,415	8.0	7.5-9.5	11.0	34.3	19.0	-	-	-	Black
15932NXK	LT	285/55R20		122/119	Q	10	80	3,305	3,000	9.0	8.0-10.0	11.7	32.6	19.0	-	-	-	Black
15933NXK	LT	295/55R20		123/120	Q	10	80	3,415	3,085	9.5	8.0-10.0	12.2	33.0	20.0	-	-	-	Black
15931NXK	LT	295/60R20		126/123	Q	10	80	3,750	3,415	8.5	8.0-10.0	11.8	34.2	20.0	-	-	-	Black
15930NXK	LT	295/65R20		129/126	Q	10	80	4,080	3,750	8.5	8.0-10.0	11.8	35.4	20.0	-	-	-	Black
16271NXK	LT	305/55R20		125/122	Q	12	80	3,640	3,305	9.5	8.5-11.0	12.4	33.5	20.0	-	-	-	Black
15867NXK		33X12.50R15		108	Q	6	35	2,205	-	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
15871NXK		35X12.50R15		113	Q	6	35	2,535	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
18938NXK		33X12.50R17		124	Q	12	80	3,527	-	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
18942NXK		35X12.50R17		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
18943NXK		37X12.50R17		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black
16263NXK		33X12.50R18		122	Q	12	80	3,305	-	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
16264NXK		35X12.50R18		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
16265NXK		33X12.50R20		119	Q	12	80	3,000	-	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
16266NXK		35X12.50R20		125	Q	12	80	3,640	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
16267NXK		37X12.50R20		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black
16401NXK		37X13.50R20		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black
16268NXK		33X12.50R22		114	Q	12	80	2,600	-	10.0	8.5-11.0	12.5	32.8	19.0	-	-	-	Black
16269NXK		35X12.50R22		121	Q	12	80	3,195	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
16270NXK		37X13.50R22		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black

Technical data can be changed without further notice.


ROADIAN MTX APPROVED FOR:



"The Nexen Roadian MTX tires have been a game changer for my performance, since the beginning of my race career. They’ve powered me through brutal rock trails, sharp turns, and rough dirt paths without fail. These tires helped put me on the podium every time. I wouldn’t run anything else!"

Woody Rose
Nexen Tire Driver
Off-Road Series

PERFORMANCE RATINGS



DUAL
SIDEWALL
OPTIONS

ROADIAN MT

MUD TERRAIN

The Roadian MT incorporates a zig-zag shoulder block design to provide outstanding traction for off-road and wet conditions, and a deep-groove design, which offers enhanced traction in deep mud and gravel. The shoulder-protector design maximizes load and durability, while optimized wide grooves provide excellent water drainage and anti-hydroplaning performance.




36 MONTHS

Product Code	P/LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
10667NXK	LT	235/75R15		104/101	Q	6	50	1,985	1,820	6.5	6.0-7.0	9.3	28.9	17.0	-	-	-	White
10674NXK		31X10.50R15		109	Q	6	50	2,270	-	8.5	7.0-9.0	10.6	30.5	18.0	-	-	-	White

Technical data can be changed without further notice.

PERFORMANCE RATINGS



ROADIAN CT8 HL

COMMERCIAL VAN/LT

The Roadian CT8 HL delivers heavy-duty performance for commercial vehicles, and it is the original equipment tire of Ram ProMaster.



36 MONTHS

60 DAYS OR 1,000 MILES


OE FITMENT ON



Product Code	P/LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
15237NXX		185/60R15C		94/92	T	6	54	1,477	1,389	5.5	5.5-6.0	7.4	23.7	13.0	-	-	-	Black	
15419NXX		195/75R16C		107/105	R	8	69	2,149	2,039	5.5	5.0-6.0	7.7	27.5	13.0	-	-	-	Black	
15409NXX	LT	215/85R16		115/112	R	10	80	2,680	2,470	6.0	5.5-7.0	8.5	30.4	15.0	-	-	-	Black	
13427NXX	LT	225/75R16		115/112	R	10	80	2,680	2,470	6.0	6.0-7.0	8.8	29.3	15.0	-	-	-	Black	Ram
15386NXX		225/75R16C		121/120	R	10	83	3,195	3,085	6.0	6.0-7.0	8.8	29.3	15.0	-	-	-	Black	Ram
15241NXX		235/65R16C		121/119	R	10	83	3,197	2,998	7.0	6.5-7.5	9.4	28.0	13.0	-	-	-	Black	
15410NXX	LT	235/85R16		120/116	R	10	80	3,042	2,778	6.5	6.0-7.5	9.3	31.7	15.0	-	-	-	Black	
15411NXX	LT	245/75R16		120/116	S	10	80	3,042	2,778	7.0	6.5-7.5	9.8	30.5	15.0	-	-	-	Black	
15412NXX	LT	265/75R16		123/120	R	10	80	3,415	3,085	7.5	7.0-8.0	10.5	31.7	15.0	-	-	-	Black	
15413NXX	LT	235/80R17		120/117	R	10	80	3,085	2,835	6.5	6.0-7.5	9.3	31.8	15.0	-	-	-	Black	
15414NXX	LT	245/70R17		119/116	R	10	80	3,000	2,755	7.0	6.5-8.0	9.8	30.6	15.0	-	-	-	Black	
15415NXX	LT	245/75R17		121/118	S	10	80	3,195	2,910	7.0	6.5-7.5	9.8	31.5	15.0	-	-	-	Black	
15416NXX	LT	265/70R17		121/118	R	10	80	3,195	2,910	8.0	7.0-8.5	10.7	31.7	15.0	-	-	-	Black	
15418NXX	LT	275/70R18		125/122	R	10	80	3,640	3,305	8.0	7.0-8.5	11.0	33.2	15.0	-	-	-	Black	

Technical data can be changed without further notice.
For more detailed OE application information, please refer to "Original Equipment 2026" page.

PERFORMANCE RATINGS



ROADIAN CT8

COMMERCIAL VAN/LT

The Roadian CT8 maintains optimal rigidity balance by including a half-depth transverse groove in the center block. Also, square-shaped dimples in the tread prevent stress, resulting in improved durability and tread life.



36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
14502NXK		185R14		102/100	T	8	65	1,874	1,764	5.0	5.0-6.0	7.4	25.6	10.5	-	-	-	Black

Technical data can be changed without further notice.

WINGUARD Sport 2

PERFORMANCE STUDLESS WINTER

The Winguard Sport 2 raises winter driving and high-grip performance to the next level. Its high-density multi-sipe elevates grip for braking on icy and snowy roads, simultaneously increasing longevity. Snowy or dry traction and cornering are improved with the directional tread. Large, wide grooves effectively drain water for anti-hydroplaning performance.




36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
16302NXK		205/55R16		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	10.5	-	-	-	Black
10394NXK		205/65R16		95	H	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	10.5	-	-	-	Black
16648NXK		215/55R16	XL	97	V	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	10.5	-	-	-	Black
15914NXK		215/65R16		98	H	4	51	1,653	-	6.5	6.0-7.5	8.7	27.0	10.5	-	-	-	Black
17742NXK		225/60R16	XL	102	V	4	50	1,874	-	6.5	6.0-8.0	9.0	26.6	10.5	-	-	-	Black
15440NXK		205/40R17	XL	84	V	4	50	1,102	-	7.5	7.0-8.0	8.3	23.5	10.5	-	-	-	Black
15447NXK		205/45R17	XL	88	V	4	50	1,235	-	7.0	6.5-7.5	8.1	24.3	10.5	-	-	-	Black
15481NXK		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	10.5	-	-	-	Black
17739NXK		205/55R17	XL	95	V	4	50	1,521	-	6.5	5.5-7.5	8.4	25.9	10.5	-	-	-	Black
15441NXK		215/40R17	XL	87	V	4	50	1,201	-	7.5	7.0-8.5	8.6	23.8	10.5	-	-	-	Black
15448NXK		215/45R17	XL	91	V	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	10.5	-	-	-	Black
15482NXK		215/50R17	XL	95	V	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	10.5	-	-	-	Black
15487NXK		215/55R17	XL	98	V	4	50	1,653	-	7.0	6.0-7.5	8.9	26.3	10.5	-	-	-	Black
15903NXK		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	10.5	-	-	-	Black
NEW 19067NXK		215/65R17	XL	103	H	4	50	1,929	-	6.5	6.0-7.5	8.7	28.0	10.5	-	-	-	Black
15450NXK		225/45R17	XL	94	V	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	10.5	-	-	-	Black
15483NXK		225/50R17	XL	98	V	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	10.5	-	-	-	Black
15488NXK		225/55R17	XL	101	V	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	10.5	-	-	-	Black
15905NXK		225/60R17	XL	103	H	4	50	1,929	-	6.5	6.0-8.0	9.0	27.6	10.5	-	-	-	Black
15917NXK		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	10.5	-	-	-	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



PERFORMANCE RATINGS



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15476NXX		235/45R17	XL	97	V	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	10.5	-	-	-	Black
15490NXX		235/55R17	XL	103	V	4	50	1,929	-	7.5	6.5-8.5	9.6	27.2	10.5	-	-	-	Black
15908NXX		235/60R17	XL	106	H	4	50	2,094	-	7.0	6.5-8.5	9.4	28.1	10.5	-	-	-	Black
15856NXX		235/65R17	XL	108	V	4	50	2,205	-	7.0	6.5-8.5	9.4	29.1	10.5	-	-	-	Black
15479NXX		245/45R17	XL	99	V	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	10.5	-	-	-	Black
15919NXX		245/65R17		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	10.5	-	-	-	Black
15920NXX		265/65R17		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	30.6	10.5	-	-	-	Black
16016NXX		215/40R18	XL	89	V	4	50	1,279	-	7.5	7.0-8.5	8.6	24.8	10.5	-	-	-	Black
16649NXX		215/45R18	XL	93	W	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	10.5	-	-	-	Black
11536NXX		215/55R18	XL	99	V	4	50	1,709	-	7.0	6.0-7.5	8.9	27.3	10.5	-	-	-	Black
15442NXX		225/40R18	XL	92	V	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	10.5	-	-	-	Black
15475NXX		225/45R18	XL	95	V	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	10.5	-	-	-	Black
15484NXX		225/50R18	XL	99	H	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	10.5	-	-	-	Black
15901NXX		225/55R18	XL	102	V	4	50	1,874	-	7.0	6.0-8.0	9.2	27.8	10.5	-	-	-	Black
15910NXX		225/60R18	XL	104	V	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	10.5	-	-	-	Black
15443NXX		235/40R18	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	10.5	-	-	-	Black
15477NXX		235/45R18	XL	98	V	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	10.5	-	-	-	Black
16024NXX		235/50R18	XL	101	V	4	50	1,819	-	7.5	6.5-8.5	9.6	27.3	10.5	-	-	-	Black
15902NXX		235/55R18	XL	104	H	4	50	1,984	-	7.5	6.5-8.5	9.6	28.1	10.5	-	-	-	Black
15911NXX		235/60R18	XL	107	H	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	10.5	-	-	-	Black
15445NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	10.5	-	-	-	Black
15480NXX		245/45R18	XL	100	V	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	10.5	-	-	-	Black
15485NXX		245/50R18	XL	104	V	4	50	1,984	-	7.5	7.0-8.5	10.0	27.7	10.5	-	-	-	Black
10390NXX		245/60R18		105	H	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	10.5	-	-	-	Black
16015NXX		255/35R18	XL	94	V	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	10.5	-	-	-	Black
15446NXX		255/40R18	XL	99	V	4	50	1,709	-	9.0	8.5-10.0	10.2	26.0	10.5	-	-	-	Black
16022NXX		255/45R18	XL	103	V	4	50	1,929	-	8.5	8.0-9.5	10.0	27.0	10.5	-	-	-	Black
15854NXX		255/55R18	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	10.5	-	-	-	Black
15913NXX		255/60R18	XL	112	H	4	50	2,469	-	7.5	7.0-9.0	10.2	30.0	10.5	-	-	-	Black
18100NXX		265/60R18	XL	114	H	4	50	2,601	-	8.0	7.5-9.5	10.7	30.5	10.0	-	-	-	Black
17730NXX		275/40R18	XL	103	V	4	50	1,929	-	9.5	9.0-11.0	10.9	26.7	10.5	-	-	-	Black
17736NXX		275/45R18	XL	107	V	4	50	2,149	-	9.0	8.5-10.5	10.7	27.8	10.5	-	-	-	Black
17738NXX		225/40R19	XL	93	V	4	50	1,433	-	8.0	7.5-9.0	9.1	26.1	10.5	-	-	-	Black
11456NXX		225/45R19	XL	96	V	4	50	1,565	-	7.5	7.0-8.5	8.9	27.0	10.5	-	-	-	Black
14893NXX		225/55R19		99	H	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	10.5	-	-	-	Black
15438NXX		235/35R19	XL	91	W	4	50	1,356	-	8.5	8.0-9.5	9.5	25.5	10.5	-	-	-	Black
15478NXX		235/45R19	XL	99	V	4	50	1,709	-	8.0	7.5-9.0	9.3	27.4	10.5	-	-	-	Black
14901NXX		235/50R19		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	28.3	10.5	-	-	-	Black
16025NXX		235/55R19	XL	105	V	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	10.5	-	-	-	Black
17588NXX		245/35R19	XL	93	W	4	50	1,433	-	8.5	8.0-9.5	9.8	25.8	10.0	-	-	-	Black
16018NXX		245/40R19	XL	98	V	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	10.5	-	-	-	Black
16023NXX		245/45R19	XL	102	V	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	10.5	-	-	-	Black
15439NXX		255/35R19	XL	96	V	4	50	1,565	-	9.0	8.5-10.0	10.2	26.0	10.5	-	-	-	Black
16019NXX		255/40R19	XL	100	V	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	10.5	-	-	-	Black
17735NXX		255/45R19	XL	104	V	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	10.5	-	-	-	Black
15900NXX		255/50R19	XL	107	V	4	50	2,149	-	8.0	7.0-9.0	10.4	29.1	10.5	-	-	-	Black
17592NXX		265/35R19	XL	98	W	4	50	1,653	-	9.5	9.0-10.5	10.7	26.3	10.0	-	-	-	Black
16650NXX		275/35R19	XL	100	W	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	10.5	-	-	-	Black
16020NXX		275/40R19	XL	105	V	4	50	2,039	-	9.5	9.0-11.0	10.9	27.7	10.5	-	-	-	Black

CONTINUED ON NEXT PAGE...

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
14896NXX		245/35R20		91	W	4	51	1,356	-	8.5	8.0-9.5	9.8	26.8	10.5	-	-	-	Black
18067NXX		245/40R20	XL	99	W	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	10.5	-	-	-	Black
17737NXX		245/45R20	XL	103	V	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	10.5	-	-	-	Black
18103NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	10.0	-	-	-	Black
10392NXX		255/45R20	XL	105	V	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	10.5	-	-	-	Black
18102NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	10.0	-	-	-	Black
17733NXX		265/35R20	XL	99	V	4	50	1,709	-	9.5	9.0-10.5	10.7	27.3	10.0	-	-	-	Black
NEW 19096NXX		265/45R20	XL	108	W	4	50	2,205	-	9.0	8.5-10.0	10.5	29.4	10.0	-	-	-	Black
14861NXX		275/30R20		93	W	4	51	1,433	-	9.5	9.0-10.0	10.9	26.5	10.0	-	-	-	Black
17593NXX		275/35R20	XL	102	W	4	50	1,874	-	9.5	9.0-11.0	10.9	27.6	10.0	-	-	-	Black
16021NXX		275/40R20	XL	106	W	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	10.5	-	-	-	Black
18104NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	10.0	-	-	-	Black
NEW 19115NXX		255/40R21	XL	102	W	4	50	1,874	-	9.0	8.5-10.0	10.2	29.0	10.0	-	-	-	Black
NEW 19126NXX		275/40R21	XL	107	W	4	50	2,149	-	9.5	9.0-11.0	10.9	29.7	10.0	-	-	-	Black

Technical data can be changed without further notice.



“Nexen Tire is extremely excited to be a part of a championship NHL franchise like the Anaheim Ducks and their premier arena, the Honda Center... This partnership will help to elevate the Nexen Tire brand among more than a million NHL fans across Southern California, and when these fans enter the Honda Center arena during a Ducks game or other premier events, they’ll know Nexen Tire has their back.”

- Brian YoonSeok Han, CEO of Nexen Tire America, Inc.

NEXEN NEXEN TIRE



OFFICIAL TIRE OF THE ANAHEIM DUCKS

WINGUARD winSpike3

STUDDABLE WINTER

The Winguard Winspike 3 tires are molded to allow for stud installation that provides better traction on ice and snow. It was developed for the drivers of sedans, crossovers, and SUVs looking for sure-footed performance and traditional wintertime traction on dry, wet, and snow-covered roads.





TOTAL COVERAGE WARRANTY



ROADSIDE ASSISTANCE

36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
18398NXX		175/70R13		82	T	4	51	1,047	-	5.0	4.5-6.0	7.0	22.7	11.0	-	-	-	Black
18402NXX		175/65R14	XL	86	T	4	50	1,168	-	5.0	5.0-6.0	7.0	23.0	11.0	-	-	-	Black
18399NXX		175/70R14		84	T	4	51	1,102	-	5.0	4.5-6.0	7.0	23.7	11.0	-	-	-	Black
18410NXX		185/60R14		82	T	4	51	1,047	-	5.5	5.0-6.5	7.4	22.8	11.0	-	-	-	Black
18404NXX		185/65R14	XL	90	T	4	50	1,323	-	5.5	5.0-6.5	7.4	23.5	11.0	-	-	-	Black
18414NXX		185/70R14	XL	92	T	4	50	1,389	-	5.5	4.5-6.0	7.4	24.3	11.0	-	-	-	Black
18412NXX		195/70R14		91	T	4	51	1,356	-	6.0	5.0-6.5	7.9	24.8	11.0	-	-	-	Black
18400NXX		175/65R15	XL	88	T	4	50	1,235	-	5.0	5.0-6.0	7.0	24.0	11.0	-	-	-	Black
18401NXX		185/55R15	XL	86	T	4	50	1,168	-	6.0	5.0-6.5	7.6	23.0	11.0	-	-	-	Black
18409NXX		185/60R15	XL	88	T	4	50	1,235	-	5.5	5.0-6.5	7.4	23.7	11.0	-	-	-	Black
17630NXX		185/65R15	XL	92	T	4	50	1,389	-	5.5	5.0-6.5	7.4	24.4	11.0	-	-	-	Black
18406NXX		195/55R15	XL	89	T	4	50	1,279	-	6.0	5.5-7.0	7.9	23.4	11.0	-	-	-	Black
18397NXX		195/60R15	XL	92	T	4	50	1,389	-	6.0	5.5-7.0	7.9	24.2	11.0	-	-	-	Black
17629NXX		195/65R15	XL	95	T	4	50	1,521	-	6.0	5.5-7.0	7.9	25.0	11.0	-	-	-	Black
18411NXX		205/65R15	XL	99	T	4	50	1,709	-	6.0	5.5-7.5	8.2	25.5	11.0	-	-	-	Black
17633NXX		205/70R15		96	T	4	51	1,565	-	6.0	5.0-7.0	8.2	26.3	11.0	-	-	-	Black
18474NXX		215/70R15		98	T	4	51	1,653	-	6.5	5.5-7.0	8.7	26.9	11.0	-	-	-	Black
10896NXX		235/75R15	XL	109	T	4	50	2,271	-	6.5	6.0-8.0	9.3	28.9	11.0	-	-	-	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



SNOW TRACTION
9



ICE TRACTION
10



DRY HANDLING
7



WET HANDLING
7



ROLLING RESISTANCE
6



COMFORT
7

WINGUARD winSpike3

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
17637NXX		195/55R16	XL	91	T	4	50	1,356	-	6.0	5.5-7.0	7.9	24.4	11.0	-	-	-	Black
17628NXX		205/55R16	XL	94	T	4	50	1,477	-	6.5	5.5-7.5	8.4	24.9	11.0	-	-	-	Black
17634NXX		205/60R16	XL	96	T	4	50	1,565	-	6.0	5.5-7.5	8.2	25.7	11.0	-	-	-	Black
17631NXX		205/65R16		95	T	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	11.0	-	-	-	Black
18413NXX		215/55R16	XL	97	T	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	11.0	-	-	-	Black
17636NXX		215/60R16	XL	99	T	4	50	1,709	-	6.5	6.0-7.5	8.7	26.1	11.0	-	-	-	Black
18432NXX		215/65R16	XL	102	T	4	50	1,874	-	6.5	6.0-7.5	8.7	27.0	11.0	-	-	-	Black
11248NXX		215/70R16		100	T	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	11.0	-	-	-	Black
11116NXX		225/60R16		98	T	4	51	1,653	-	6.5	6.0-8.0	9.0	26.6	11.0	-	-	-	Black
11184NXX		225/70R16	XL	107	T	4	50	2,149	-	6.5	6.0-7.5	9.0	28.4	11.0	-	-	-	Black
10668NXX		235/70R16		106	T	4	51	2,094	-	7.0	6.0-8.0	9.4	29.0	11.0	-	-	-	Black
11245NXX		245/70R16		107	T	4	51	2,149	-	7.0	6.5-8.0	9.8	29.5	11.0	-	-	-	Black
10870NXX		245/75R16		111	T	4	51	2,403	-	7.0	6.5-8.0	9.8	30.5	11.0	-	-	-	Black
10799NXX		265/70R16		112	T	4	51	2,469	-	8.0	7.0-9.0	10.7	30.6	11.0	-	-	-	Black
10794NXX		265/75R16		116	T	4	51	2,756	-	7.5	7.0-9.0	10.5	31.7	11.0	-	-	-	Black
18422NXX		205/50R17	XL	93	T	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	11.0	-	-	-	Black
18423NXX		215/45R17	XL	91	T	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	11.0	-	-	-	Black
18417NXX		215/50R17	XL	95	T	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	11.0	-	-	-	Black
17632NXX		215/55R17	XL	98	T	4	50	1,653	-	7.0	6.0-7.5	8.9	26.3	11.0	-	-	-	Black
18421NXX		215/60R17	XL	100	T	4	50	1,764	-	6.5	6.0-7.5	8.7	27.2	11.0	-	-	-	Black
11013NXX		215/65R17		99	T	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	11.0	-	-	-	Black
18425NXX		225/45R17		91	T	4	51	1,356	-	7.5	7.0-8.5	8.9	25.0	11.0	-	-	-	Black
17635NXX		225/50R17	XL	98	T	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	11.0	-	-	-	Black
18420NXX		225/55R17	XL	101	T	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	11.0	-	-	-	Black
10910NXX		225/60R17		99	T	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	11.0	-	-	-	Black
10826NXX		225/65R17		102	T	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	11.0	-	-	-	Black
18424NXX		235/45R17	XL	97	T	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	11.0	-	-	-	Black
18431NXX		235/55R17	XL	103	T	4	50	1,929	-	7.5	6.5-8.5	9.6	27.2	11.0	-	-	-	Black
11229NXX		235/60R17		102	T	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	11.0	-	-	-	Black
10886NXX		235/65R17		104	T	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	11.0	-	-	-	Black
18426NXX		245/45R17	XL	99	T	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	11.0	-	-	-	Black
10914NXX		245/65R17		107	T	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	11.0	-	-	-	Black
10919NXX		245/70R17		110	T	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	11.0	-	-	-	Black
11183NXX		265/65R17	XL	116	T	4	50	2,756	-	8.0	7.5-9.5	10.7	30.6	11.0	-	-	-	Black
10905NXX		265/70R17		115	T	4	51	2,679	-	8.0	7.0-9.0	10.7	31.7	11.0	-	-	-	Black
11606NXX		215/55R18		95	T	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	11.0	-	-	-	Black
18427NXX		225/40R18	XL	92	T	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	11.0	-	-	-	Black
18429NXX		225/45R18	XL	95	T	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	11.0	-	-	-	Black
11241NXX		225/50R18	XL	99	T	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	11.0	-	-	-	Black
10888NXX		225/55R18		98	T	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	11.0	-	-	-	Black
11061NXX		225/60R18	XL	104	T	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	11.0	-	-	-	Black
18419NXX		235/40R18	XL	95	T	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	11.0	-	-	-	Black
18418NXX		235/45R18	XL	98	T	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	11.0	-	-	-	Black
18415NXX		235/50R18	XL	101	T	4	50	1,819	-	7.5	6.5-8.5	9.6	27.3	11.0	-	-	-	Black
11012NXX		235/55R18		100	T	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	11.0	-	-	-	Black
10688NXX		235/60R18	XL	107	T	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	11.0	-	-	-	Black
10629NXX		235/65R18		106	T	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	11.0	-	-	-	Black
18416NXX		245/40R18	XL	97	T	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	11.0	-	-	-	Black
18430NXX		245/45R18	XL	100	T	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	11.0	-	-	-	Black
18428NXX		245/50R18	XL	104	T	4	50	1,984	-	7.5	7.0-8.5	10.0	27.7	11.0	-	-	-	Black
11095NXX		245/60R18		105	T	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	11.0	-	-	-	Black
11285NXX		255/55R18	XL	109	T	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	11.0	-	-	-	Black

CONTINUED ON NEXT PAGE...

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread- wear	Trac.	Temp.	
11242NXX		255/60R18	XL	112	T	4	50	2,469	-	7.5	7.0-9.0	10.2	30.0	11.0	-	-	-	Black
10989NXK		255/65R18		111	T	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	11.0	-	-	-	Black
11233NXK		265/60R18	XL	114	T	4	50	2,601	-	8.0	7.5-9.5	10.7	30.5	11.0	-	-	-	Black
11011NXK		265/65R18		114	T	4	51	2,601	-	8.0	7.5-9.5	10.7	31.5	11.0	-	-	-	Black
10670NXX		275/65R18		116	T	4	51	2,756	-	8.0	7.5-9.5	11.0	32.1	11.0	-	-	-	Black
10796NXX		225/55R19	XL	103	T	4	50	1,929	-	7.0	6.0-8.0	9.2	28.8	11.0	-	-	-	Black
11124NXX		235/40R19	XL	96	T	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	11.0	-	-	-	Black
11071NXK		235/50R19	XL	103	T	4	50	1,929	-	7.5	6.5-8.5	9.6	28.3	11.0	-	-	-	Black
10953NXK		235/55R19	XL	105	T	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	11.0	-	-	-	Black
11243NXK		245/45R19	XL	102	T	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	11.0	-	-	-	Black
11247NXX		245/50R19	XL	105	T	4	50	2,039	-	7.5	7.0-8.5	10.0	28.7	11.0	-	-	-	Black
11096NXX		245/55R19		103	T	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	11.0	-	-	-	Black
11244NXX		255/50R19	XL	107	T	4	50	2,149	-	8.0	7.0-9.0	10.4	29.1	11.0	-	-	-	Black
11231NXK		255/55R19	XL	111	T	4	50	2,403	-	8.0	7.0-9.0	10.4	30.0	11.0	-	-	-	Black
10828NXX		235/55R20		102	T	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	11.0	-	-	-	Black
10894NXK		255/55R20	XL	110	T	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	11.0	-	-	-	Black
11127NXX		265/50R20		107	T	4	51	2,149	-	8.5	7.5-9.5	10.9	30.5	11.0	-	-	-	Black
11249NXX		275/45R20	XL	110	T	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	11.0	-	-	-	Black
11234NXX		275/50R20	XL	113	T	4	50	2,535	-	8.5	7.5-9.5	11.2	30.9	11.0	-	-	-	Black
10887NXX		275/55R20		113	T	4	51	2,535	-	8.5	7.5-9.5	11.2	31.9	11.0	-	-	-	Black
10897NXX		275/60R20		115	T	4	51	2,679	-	8.0	7.5-9.5	11.0	33.0	11.0	-	-	-	Black
11235NXX		285/50R20	XL	116	T	4	50	2,756	-	9.0	8.0-10.0	11.7	31.3	11.0	-	-	-	Black
11062NXX		285/45R22	XL	114	T	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	11.0	-	-	-	Black
10903NXX		185/60R15C		94/92	T	6	54	1,477	1,389	5.5	5.5-6.0	7.4	23.7	12.5	-	-	-	Black
11014NXX		195/75R16C		107/105	R	8	69	2,149	2,039	5.5	5.0-6.0	7.7	27.5	12.5	-	-	-	Black
10984NXK		225/75R16C		121/120	R	10	83	3,195	3,085	6.0	6.0-7.0	8.8	29.3	12.5	-	-	-	Black
11089NXK		235/65R16C		121/119	R	10	83	3,197	2,998	7.0	6.5-7.5	9.4	28.0	12.5	-	-	-	Black
18811NXX	LT	245/75R16		120/116	R	10	80	3,042	2,778	7.0	6.5-7.5	9.8	30.5	16.0	-	-	-	Black
10904NXK	LT	265/75R16		123/120	R	10	80	3,415	3,085	7.5	7.0-8.0	10.5	31.7	16.0	-	-	-	Black
10921NXX	LT	245/75R17		121/118	R	10	80	3,195	2,910	7.0	6.5-7.5	9.8	31.5	16.0	-	-	-	Black
18810NXX	LT	265/70R17		121/118	R	10	80	3,195	2,910	8.0	7.0-8.5	10.7	31.7	16.0	-	-	-	Black
10955NXK	LT	275/65R18		123/120	R	10	80	3,415	3,085	8.0	8.0-9.5	11.0	32.1	16.0	-	-	-	Black
10900NXK	LT	275/70R18		125/122	R	10	80	3,640	3,305	8.0	7.0-8.5	11.0	33.2	16.0	-	-	-	Black
10987NXX	LT	275/65R20		126/123	R	10	80	3,750	3,415	8.0	7.5-9.5	11.0	34.1	16.0	-	-	-	Black

Technical data can be changed without further notice.
(P) Metric & C Type: T.S.M.I. #12
LT Type: T.S.M.I. #15

Original Equipment 2026 PATTERNS



Original Equipment 2026

Brand	Model	Model Year	Product	Product Code	Size	LI/SR		UTQG Wear
	A3	2023-	N'FERA AU7	17577NXX	225/45R17	91	H	500 A A
	Q3	2025-	N'FERA SPORT	11760NXX	235/55R18	100	V	300 A A
	A6/A7	2025-	N'FERA SPORT	91067NXX	245/45R19	102	Y	300 A A
	X3/X4	2025-	N'FERA SPORT	17580NXX	245/50R19	105	Y	300 AA A
	IX	2025-	N'FERA SPORT	14717NXX 14707NXX	235/60R20 255/50R21	108 109	H Y	280 A A 280 A A
	Mini	2025-	N'FERA SPORT	10331NXX	215/45R17	91	Y	280 AA A
	All New 200	2015-2017	CP671	13683NXX	215/55R17	94	H	400 A A
				13660NXX	235/45R18	94	H	400 A A
				13680NXX	235/40R19	96	H	400 A A
	Pacifica	2017-	N'PRIZ RH7@	14376NXX	235/60R18	103	H	680 A A
	Challenger RT Scat Pack 1320	2020-2023	N'FERA SUR4G	17387NXX	275/40R20	102	Y	100 A A
	Durango	2019-	N'PRIZ RH7@	16469NXX	P 245/65R18	110	H	500 A A
	Journey	2019-2021	N'PRIZ RH7	16489NXX	225/65R17	102	H	540 A A
				16490NXX	225/55R19	99	H	440 A A
	Charger/Charger EV, Challenger/Challenger EV	2025-	N'FERA AU7	17589NXX	245/55R18	103	Y	500 AA A
				17590NXX	255/45R20	105	V	500 A A
	500L	2013-2020	CP671	12525NXX	205/55R16	91	H	400 A A
				12526NXX	225/45R17	91	V	400 A A
	500X	2014-2019	CP671	13536NXX	215/55R17	94	V	400 A A
				13535NXX	215/60R17	96	T	400 A A
	Elantra	2016-2020	N'PRIZ AH8	14386NXX	195/65R15	91	T	500 A A
		2012-2017	CP671 H	12842NXX	P 215/45R17	87	H	400 A A
		2016-2020	N'PRIZ AH8	14194NXX	205/55R16	91	H	560 A A
				14198NXX	225/45R17	91	W	500 A A
	Kona	2019-	N'PRIZ AH8	15605NXX	205/60R16	92	H	500 A A
		2022-	N'PRIZ S	17068NXX	215/55R17	94	V	560 A A
	Kona EV	2019-	N'PRIZ AH8	16383NXX	215/55R17	94	V	500 A A
	Nexo	2026-	N'FERA SUPREME S	91137NXX	225/55R18	98	W	520 A A
	Tucson	2016-2021	N'PRIZ RH7	14179NXX	225/55R18	98	H	540 A A
		2021-	ROADIAN GTX	16581NXX	235/65R17	104	H	600 A A
		2025-	ROADIAN GTX	10281NXX	235/60R18	103	H	600 A A
	Grand Cherokee	2019-	N'PRIZ RH7@	16469NXX	P 245/65R18	110	H	500 A A
	Cherokee Hybrid	2026	ROADIAN GTX	15639NXX	225/65R17	102	T	600 A A
	Wagoneer	2022-	ROADIAN HTX RH5	15278NXX	275/55R20	113	T	640 A A
	Wrangler	2023-	ROADIAN HTX 2	11717NXX	245/75R17	112	S	700 A A
			ROADIAN HTX 2	11696NXX	255/60R20	113	T	700 A A
			ROADIAN ATX	11702NXX	245/75R17	112	S	560 A A
			ROADIAN ATX	11700NXX	LT 255/75R17	111/108	Q	-
	Recon BEV	2025-	ROADIAN ATX	18041NXX	265/70R18	116	T	580 A B
	Gladiator	2023-	ROADIAN HTX 2	11717NXX	245/75R17	112	S	700 A A
			ROADIAN HTX 2	11696NXX	255/60R20	113	T	700 A A
			ROADIAN ATX	11702NXX	245/75R17	112	S	560 A A
			ROADIAN ATX	11700NXX	LT 255/75R17	111/108	Q	-
	Carnival	2021-	ROADIAN GTX	17136NXX	235/65R17	104	H	600 A A
	Forte	2014-2016	CP671	12841NXX	P 195/65R15	89	T	440 A A
		2017-2019	N'PRIZ AH8	13466NXX	195/65R15	91	T	500 A A
		2014-2018	CP671 H	12842NXX	P 215/45R17	87	H	400 A A
		2014-2018	CP671	16960NXX	P 225/40R18	88	V	400 A A
	Niro	2023-	N'PRIZ S	17195NXX	205/60R16	92	H	560 A A
	Niro EV	2023-	N'PRIZ S	18382NXX	215/55R17	94	V	560 A A
	Optima	2011-2014	CP671	11449NXX	P 205/65R16	94	H	400 A A
		2016-2020	N'PRIZ AH8	13904NXX	205/65R16	95	H	440 A A
		2011-2015	CP671	12259NXX	P 215/55R17	93	V	400 A A
		2013-2015	CP662	12261NXX	225/45R18	95	V	440 A A
	Seltos	2026	N'PRIZ S	18638NXX	205/65R16	95	H	560 A A
	Sorrento	2015-2020	N'PRIZ RH7	13423NXX	235/60R18	103	H	440 A A
	Sorento HEV	2021-	ROADIAN GTX	16581NXX	235/65R17	104	H	600 A A
	Soul	2010-2013	CP662	11073NXX	P 195/65R15	89	S	440 A A
	Soul	2011-2013	CP662	11074NXX	P 205/55R16	89	H	440 A A
	Soul	2014-2018	CP671	13333NXX	205/60R16	92	H	400 A A

CONTINUED ON NEXT PAGE...

Technical data can be changed without further notice.

CONTINUED FROM PREVIOUS PAGE

NEW

NEW

Brand	Model	Model Year	Product	Product Code	Size	LI/SR		UTQG Wear
	Veloster	2012-2017	CP671 H	12842NXX	P 215/45R17	87	H	400 A A
		2018-2020	N'PRIZ AH8	14749NXX	215/45R17	87	H	500 A A
				14708NXX	225/40R18	88	W	500 A A
	Venue	2020-	N'PRIZ AH8	16094NXX	205/55R17	91	H	500 A A
	Grand Cherokee	2019-	N'PRIZ RH7@	16469NXX	P 245/65R18	110	H	500 A A
	Cherokee Hybrid	2026	ROADIAN GTX	15639NXX	225/65R17	102	T	600 A A
	Wagoneer	2022-	ROADIAN HTX RH5	15278NXX	275/55R20	113	T	640 A A
	Wrangler	2023-	ROADIAN HTX 2	11717NXX	245/75R17	112	S	700 A A
			ROADIAN HTX 2	11696NXX	255/60R20	113	T	700 A A
			ROADIAN ATX	11702NXX	245/75R17	112	S	560 A A
			ROADIAN ATX	11700NXX	LT 255/75R17	111/108	Q	-
	Recon BEV	2025-	ROADIAN ATX	18041NXX	265/70R18	116	T	580 A B
	Gladiator	2023-	ROADIAN HTX 2	11717NXX	245/75R17	112	S	700 A A
			ROADIAN HTX 2	11696NXX	255/60R20	113	T	700 A A
			ROADIAN ATX	11702NXX	245/75R17	112	S	560 A A
			ROADIAN ATX	11700NXX	LT 255/75R17	111/108	Q	-
	Carnival	2021-	ROADIAN GTX	17136NXX	235/65R17	104	H	600 A A
	Forte	2014-2016	CP671	12841NXX	P 195/65R15	89	T	440 A A
		2017-2019	N'PRIZ AH8	13466NXX	195/65R15	91	T	500 A A
		2014-2018	CP671 H	12842NXX	P 215/45R17	87	H	400 A A
		2014-2018	CP671	16960NXX	P 225/40R18	88	V	400 A A
	Niro	2023-	N'PRIZ S	17195NXX	205/60R16	92	H	560 A A
	Niro EV	2023-	N'PRIZ S	18382NXX	215/55R17	94	V	560 A A
	Optima	2011-2014	CP671	11449NXX	P 205/65R16	94	H	400 A A
		2016-2020	N'PRIZ AH8	13904NXX	205/65R16	95	H	440 A A
		2011-2015	CP671	12259NXX	P 215/55R17	93	V	400 A A
		2013-2015	CP662	12261NXX	225/45R18	95	V	440 A A
	Seltos	2026	N'PRIZ S	18638NXX	205/65R16	95	H	560 A A
	Sorrento	2015-2020	N'PRIZ RH7	13423NXX	235/60R18	103	H	440 A A
	Sorento HEV	2021-	ROADIAN GTX	16581NXX	235/65R17	104	H	600 A A
	Soul	2010-2013	CP662	11073NXX	P 195/65R15	89	S	440 A A
	Soul	2011-2013	CP662	11074NXX	P 205/55R16	89	H	440 A A
	Soul	2014-2018	CP671	13333NXX	205/60R16	92	H	400 A A

CONTINUED ON NEXT PAGE...

Technical data can be changed without further notice.

Brand	Model	Model Year	Product	Product Code		Size	LI/SR		UTQG Wear
	Soul	2014-2018	CP671 H	13321NXK		235/45R18	94	V	400 A A
				13320NXK		215/55R17	94	V	400 A A
		2019-	N'PRIZ AH8	15605NXK		205/60R16	92	H	500 A A
		2022-	N'PRIZ S	17068NXK		215/55R17	94	V	560 A A
	Soul EV	2015-2020	N'BLUE EV	15705NXK		205/60R16	92	H	400 A A
	Sportage	2011-2013	CP671	11462NXK		215/70R16	100	H	460 A A
		2015-2021	N'PRIZ RH7	14179NXK		225/55R18	98	H	540 A A
		2021-	ROADIAN GTX	16581NXK		235/65R17	104	H	600 A A
	Outlander Sport	2014-	N'PRIZ RH7	12817NXK	P	225/55R18	97	H	440 A A
	Outlander	2021-	ROADIAN GTX	16640NXK	P	255/45R20	101	W	600 A A
		2025-	ROADIAN GTX	17001NXK	P	255/45R20	101	W	680 A A
	Outlander PHEV	2026	ROADIAN GTX	19456NXK		255/45R20	105	W	600 A A
	1500	2018-	ROADIAN HTX RH5	15278NXK		275/55R20	113	T	640 A A
	3500	2014-	ROADIAN HTX RH5	14265NXK	LT	235/80R17	120/117	R	-
			ROADIAN AT PRO RA8	14264NXK	LT	235/80R17	120/117	R	-
		2017-	ROADIAN AT PRO RA8	10150NXK	LT	275/70R18	125/122	R	-
	ProMaster	2015-	ROADIAN CT8 HL	13427NXK	LT	225/75R16	115/112	R	-
		2017-	ROADIAN CT8 HL	15386NXK		225/75R16C	121/120	R	-
	ProMaster City	2017-2023	N'PRIZ AH8	14369NXK		215/55R16	97	H	440 A A
	Jetta	2019-	N'PRIZ AH8	15530NXK		205/55R17	91	H	500 A A
		2022-	N'FERA AU7	16643NXK		205/60R16	92	H	500 A A
				16694NXK		205/55R17	91	H	500 A A
	Passat	2020-2022	N'FERA AU7	16313NXK		215/55R17	94	H	560 A A
	Atlas	2024-	ROADIAN GTX	18071NXK		255/50R20	105	T	540 A A
	Cayenne	2023-	N'FERA SPORT SUV	18119NXE		285/45R21	113	Y	300 AA A
				18122NXE		315/40R21	115	Y	300 AA A
	Macan	2019-	N'FERA RU1	15697NXK		235/55R19	101	Y	320 AA A
				15698NXK		255/50R19	103	Y	320 AA A
	Panamera	2021-	N'FERA SPORT	16391NXK		265/45R19	105	Y	300 AA A
				16392NXK		295/40R19	108	Y	300 AA A
	GLE/GLS/GLC	2019-	402	16014NXC	T	155/80R19	114	M	-

Technical data can be changed without further notice.

NEXEN TOTAL COVERAGE WARRANTY

1. ABOUT NEXEN TOTAL COVERAGE WARRANTY

This limited warranty only applies to the original purchaser of new replacement tires sold by NEXEN TIRE USA (as below NEXEN TIRE), and tires must have been used on the same vehicle that they were originally installed on.

This warranty applies to tires purchased after January 1, 2026. Tires purchased before January 1, 2026 are subject to the previous published warranty.

The NEXEN Total Coverage Warranty offers the consumer the following benefits:

- Coverage for Defects in Workmanship and Materials
- Mileage Tread Wear Limited Warranty*
- Road Hazard Replacement Program*
- Roadside Assistance – Flat Tire Change or Tow Service
- 60-day Satisfaction Guarantee Trial Warranty

*Most, but not all, NEXEN TIRE patterns come with a Mileage Tread Wear Warranty and/or Road Hazard Replacement. Check each pattern for coverage.

For purposes of this warranty, the term “usable tread life” will be determined as having at least 2/32” (1.6mm) of tread remaining evenly across the tire. If less than 2/32” (1.6mm) of tread remains at any point on the face of the tire, the tire will be considered past its usable tread life and subject to any and all conditions stated below.

Warranty program NOT APPLICABLE to other U.S. territories (Guam, Northern Marianas Islands, American Samoa, Puerto Rico, and U.S. Virgin Islands).

2. WORKMANSHIP AND MATERIALS

All NEXEN tires are warranted against defects in workmanship and material and will be replaced 100% free of charge for the initial warranty period, which is the first 2/32” (1.6mm) of original usable tread life, or within 12 months from the period of purchase, whichever comes first.

After the 100% replacement term expires and the tire is still within 72 months from date of manufacture, the amount of credit will be determined by the percentage of original tread depth remaining on the tire. Under all circumstances, the cost of mounting, balancing, and any other service charges, including applicable taxes, are required to be paid by the consumer.

3. MILEAGE TREAD WEAR LIMITED WARRANTY

Designated patterns manufactured by NEXEN TIRE are assigned a mileage warranty that protects the consumer against premature tread wear. If a tire reaches the end of its “usable tread life” before the stated mileage warranty, the consumer will be issued a replacement NEXEN tire on a pro-rated basis, which means the consumer will be responsible for a percentage of the replacement cost. In order to maintain the tread wear warranty, all tires must be rotated at least every 5,000–6,000 miles (8,000–10,000 km). Under all circumstances, the cost of mounting, balancing, and any other service charges, including applicable taxes, are required to be paid by the consumer.

4. WHAT IS NOT COVERED UNDER THIS LIMITED WARRANTY

This warranty does not cover tires damaged due to misuse, abuse, or accident such as:

- Ride complaints after the first 2/32” of tread wear or first year of purchase, whichever comes first. Replacement of three (3) or more tires from the same vehicle will not be accepted.
- Road hazard damage such as cuts, snags, punctures or tire repair, bruises, impact breaks, etc. (Check Road Hazard Replacement Program for patterns that are covered against this type of damage.)
- Premature or irregular wear (a measured tread difference of 2/32” [1.6mm] or more across the tread on the same tire) due to vehicle mechanical deficiencies or failure to rotate the tires at recommended intervals.
- Tires on any vehicle registered and normally operated outside the United States.
- Damage from incorrect mounting or dismounting of the tire, incorrect application, water or other material trapped inside the tire during mounting, or failure to balance the tires.
- Damage from over/under inflation, overload, or defective vehicle mechanical conditions.
- Tires with a lower load index and/or speed rating than that of the OE tire.
- Racing, off-road use, and misapplication of tire to vehicle.
- Ozone or weather cracking on tires after 48 months from the date of manufacture.
- Minor cosmetic ozone or weather cracking.
- Any tires worn beyond the wear indicators (Less than 2/32” remaining tread depth).
- Flat spotting caused by improper storage or brake lock.
- Accident, fire, chemical corrosion, tire alteration, willful abuse, or vandalism.
- Tires in which D.O.T. identification number and/or barcode on bead and/or brand name removed intentionally.
- Loss of time or use, inconvenience, or any incidental or consequential damage.
- Original equipment tires on new vehicle. (See separate warranty, if applicable, in your vehicle's glove box.)
- Tires purchased as used.
- Tires that have been recapped, retreaded, or regrooved.
- Use of tire chains.
- Tires used on recreational vehicles (for camping and motor homes, etc.) or in commercial service (i.e., tires used for taxi service, delivery, ride-sharing vehicles, etc.).
- Tires stored improperly.

NEXEN TOTAL COVERAGE WARRANTY

5. OTHER LIMITATIONS INCLUDE, BUT ARE NOT LIMITED, TO THE FOLLOWING:

- Failure to rotate tires as recommended voids the tread wear warranty.
- If tires are different sizes on front and rear of vehicle and therefore can't be rotated, the mileage warranty for the rear tires will be half of the stated mileage warranty.
- Winter tires must be used only in winter months, which are determined to be September 1st through April 30th of the following year. Documentation is required showing date of installation and removal to maintain tread wear warranty.

6. ROAD HAZARD REPLACEMENT PROGRAM

Most patterns sold by NEXEN TIRE are covered by a road hazard warranty that protects the consumer against non-repairable damage caused by puncture, snag, cut, bruise, or impact break. Typical road hazards are nails, glass, potholes, and other debris. Covered tires will be eligible for a free replacement for the first 2/32" of original tread depth, or for a period of one year from the date of purchase, whichever comes first. If the D.O.T. identification number on the tire is greater than two years from the adjustment date, an invoice showing date of purchase is necessary. The cost of mounting, balancing, and any other service charges, including applicable taxes, are required to be paid by the consumer.

7. WHAT IS NOT COVERED UNDER ROAD HAZARD REPLACEMENT PROGRAM

- A tire that is damaged due to vandalism.
- A tire that is damaged due to an accident.
- A tire that is repairable under U.S. Tire Manufacturers Association (USTMA).
- A tire that has failed due to commercial use.
- A tire that is damaged or failed due to racing or off-road use.
- A tire that is damaged due to use of snow chains or studs.
- A tire that is damaged or failed due to irregular wear caused by mechanical issues.
- Original equipment tires on new vehicle.
- Tires transferred from the vehicle that they were originally installed on.

8. 60-DAY SATISFACTION GUARANTEE TRIAL WARRANTY

If you're not completely satisfied for any reason, other than the conditions that are listed in the "WHAT IS NOT COVERED" section with your eligible tires, simply return them with the proof of purchase to the dealer where they were purchased within 60 days or 1,000 miles, whichever comes first, for a new complete set of NEXEN brand replacements only.

Limitations and Requirements

- This trial warranty only applies to the original purchaser and is non-transferable.
- Any return of less than a full set of tires will not be accepted.
- Proof of purchase must be provided for both the original set and replacement set.
- Tires must be returned undamaged. Tires exhibiting misuse, road hazard, mounting damage, vehicle mechanical-related problems, repairs, improper inflation, vandalism, run flat, and/or any racing activity wear are excluded from this trial warranty.
- Original purchaser pays the amount due on a new replacement tire, less the amount of credit, including applicable taxes, mounting and balancing charges, and/or the cost of other services ordered.
- Replacement tire must be installed on original purchase vehicle.
- Replacement must be done at original place of purchase.
- Only original purchase is covered by 60-day Satisfaction Guarantee Trial Warranty.
- Replacement set is not covered by 60-day Satisfaction Guarantee Trial Warranty.
- Tires measuring more than 1/32" of tread wear from original tread depth are excluded from trial warranty.

9. CONSUMER'S OBLIGATION WHEN FILING CLAIM

To maintain Mileage Tread Wear Warranty and Road Hazard Replacement Program, the consumer is responsible for the following:

- Any claims must be presented to a participating authorized NEXEN TIRE dealer.
- Submit or present a copy of the original purchase receipt with documented automobile mileage at time of tire installation and of tire dismounting.
- Submit a tire rotation record showing that all tires have been rotated at least every 5,000–6,000 miles (8,000–10,000 km). Tire rotation record is not necessary for road hazard claims when tire is within 2/32" difference of remaining tread depth as measured from shoulder to shoulder on the claim tire and compared to the remaining tread depth of the opposite front/rear or left/right tire.
- NEXEN TIRE Claim Adjustment forms are provided by the dealer. Keep a copy for your records and leave the tire with the dealer for warranty processing.

NEXEN TOTAL COVERAGE WARRANTY

Warranty Information by Pattern (for Replacement Tires Only)

Tire Pattern	Tread Wear Mileage Warranty	Road Hazard Replacement Warranty (First 2/32" or 1 Year)	60-day Trial	36-Month Roadside Assistance Program
N'FERA SPORT R	N/A	N/A	N/A	YES
N'FERA SPORT	30,000	YES	90 DAYS or within 2/32"	YES
N'FERA SU1	25,000	YES	YES	YES
N'FERA AU7	50,000	YES	YES	YES
N'BLUE 4 SEASON 2	70,000	YES	YES	YES
N5000 PLATINUM	55,000 (W)	YES	YES	YES
	70,000 (H,V)			
N'PRIZ S	80,000* *60,000 FOR EVS	YES	YES	YES
N'PRIZ AH8	75,000	YES	YES	YES
N'FERA PRIMUS AS T1	50,000 (W,Y)	YES	YES	YES
	65,000 (H,V)			
CP672	70,000	N/A	N/A	YES
N5000 PLUS	60,000	N/A	N/A	YES
ARIA AH7	80,000	YES	YES	YES
N'PRIZ AH5	65,000	YES	YES	YES
SB-802	N/A	N/A	N/A	YES
ROADIAN HP	40,000	YES	N/A	YES
ROADIAN GTX	70,000	YES	YES	YES
ROADIAN HTX 2	70,000 (P)	YES	YES	YES
	50,000 (LT)			
ROADIAN HTX 2 (LT225/75R16 & 235/65R16C)	N/A	N/A	YES	YES
	65,000 (P)			
ROADIAN HTX RH5	40,000 (LT)	N/A	N/A	YES
	70,000 (P)			
ROADIAN ATX	60,000 (LT)	YES	YES	YES
	50,000 (P)			
ROADIAN AT PRO	40,000 (LT)	N/A	N/A	YES
	70,000 (P)			
ROADIAN MTX	N/A	N/A	YES	YES
ROADIAN MT	N/A	N/A	N/A	YES
ROADIAN CT8 HL	N/A	N/A	YES	YES
ROADIAN CT8	N/A	N/A	N/A	YES
WINGUARD SPORT 2	N/A	N/A	N/A	YES
WINGUARD WINSPIKE 3	N/A	N/A	N/A	YES

10. TIRES PURCHASED FROM UNAUTHORIZED DEALERS

IT IS IMPORTANT TO PURCHASE OUR TIRES FROM AUTHORIZED DEALERS ONLY.

Tires imported by NEXEN TIRE AMERICA INC. are suitable for the U.S. conditions, whereas tires not imported by NEXEN TIRE AMERICA INC. may meet an alternative specification that is less suitable for the U.S. conditions. In addition, unauthorized importers or dealers may provide tires that are several months or years older by the time they arrived in the U.S., or they may have been stored in improper or unfavorable conditions.

Taking them into consideration, in order to provide the best quality of our tires and services, we need to ensure that tires are purchased from an authorized dealer and imported by NEXEN TIRE AMERICA INC. Tires purchased from an unauthorized dealer or not imported by NEXEN TIRE AMERICA INC. ARE NOT COVERED by this warranty. If a tire purchased from an unauthorized dealer or not imported by NEXEN TIRE AMERICA INC. fails or is defective, all claims relating to that tire should be directed to the dealer or importer and not to NEXEN TIRE AMERICA INC.

Please note that sellers on eBay.com, Craigslist, or similar online markets are not authorized dealers of NEXEN branded tires. When purchasing on these online markets, it is fully your responsibility as a customer to ensure that sellers are authorized by NEXEN TIRE AMERICA INC. The following businesses have been identified as unauthorized by NEXEN TIRE AMERICA INC. to sell NEXEN branded tires in the U.S. The list is subject to change/update.

- TGI (TIRE GROUP INTERNATIONAL)
- TIREMAX INTERNATIONAL
- PARTSMAX

If you are concerned about whether sellers are authorized by us, please contact us at 1-800-57-NEXEN (63936), and we can verify whether the seller is authorized or tires are imported by NEXEN TIRE AMERICA INC.

11. ROADSIDE ASSISTANCE

All patterns sold after January 1, 2026, by NEXEN TIRE in the United States are eligible for free 24/7/365 Roadside Assistance for a period of 36 months from the purchase date. Upon purchasing NEXEN tires, the consumer will have access to a toll-free phone number to call in case of a flat tire. A qualified professional will change your flat tire with your spare tire free of charge. If a working spare is not available, towing will be provided free of charge to the nearest NEXEN TIRE dealer or safe and secure location. Activation is required before Roadside Assistance service can be utilized.

NEXEN TIRE reserves the right to change the terms and conditions of all warranties at any time.

NEXEN TOTAL COVERAGE WARRANTY

12. TIRE CARE AND MAINTENANCE GUIDE

Tire failure can result in serious damage and/or personal injury. To reduce the risk of tire failure, we recommend the following:

- Maintain proper inflation pressure, and do not use at under-inflation or over-inflation. Pressure should be set at the level recommended by vehicle manufacturer.
- Wheel alignment and balancing should be checked at regular intervals.
- Do not overload. The maximum load-carrying capacity is molded on the sidewall of the tire.
- Do not spin your tires excessively, and avoid driving over curbs, potholes, obstacles, and edges of pavement.
- Never drive on smooth (bald) tires. By law, tires must be replaced when 2/32" of tread depth remains, as indicated by tread wear indicator molded in the tread grooves.
- Check your tires frequently for any scrapes, cuts, foreign objects, separations, or bulges. If damage is found, do not attempt to dismount the tire yourself. Change damaged tire with the spare, and contact your local authorized NEXEN TIRE dealer immediately.
- Do not drive in excess of speed limits allowed by law or the maximum speed justified by driving conditions.
- To achieve proper even wear and gain maximum tread life, tire rotation at regular intervals is required.

Please be advised that the extreme ultra high performance tire, N'Fera Sport R, although approved for street use, is targeted for track and competition driving.

- Driving on wet roads, heavy rain, or standing water with competition-oriented tires may cause hydroplaning and loss of control. Use extreme caution and drive slowly on wet roads.
- Competition-oriented tires should not be driven on snow- or ice-covered roads. At temperatures below 40°F, tires may experience reduced traction. It is recommended that suitable all-season or winter tires be installed at temperatures below 40°F.
- When exposed to temperatures below 20°F, tires may exhibit surface cracking. Never use tires that have cracked. Surface cracking due to cold temperatures is not a warrantable condition.
- Always store competition-oriented tires indoors at temperatures above 20°F. If tires have been subjected to temperatures below 20°F, they must be warmed to at least 50°F for 24 hours before using or installing. If using unheated storage, tires should be removed from the vehicle and deflated to half the normal air pressure. Before use, tires must be inspected for signs of cracking and returned to normal air pressure.

For more information or service regarding NEXEN TIRE, please contact your nearest authorized NEXEN TIRE dealer.

For more information, please call the toll-free technical support number: 1-800-57-NEXEN (63936) / 1-866-70-NEXEN (63936)

NEXEN warranty portal warranty assistance link: service.nexentireonline.com

(Please use this link for any customer warranty assistance needed)

MINIMUM ADVERTISED PRICING POLICY (MAP)

Nexen Tire America, Inc. Minimum Advertised Pricing Policy (MAP) (Effective January 1, 2022)

- I. Nexen Tire America brand ("Nexen") is synonymous with high-quality products and superior customer service and support. We are committed to maintain and protect our brand. These policies have been established to improve and protect the reputation of the Nexen brand, its resale network, and customer relationships, and give all resellers an equal ability to sell and promote the product. Nexen gives its direct dealers and associated dealers (collectively called "authorized resellers") and third-party resellers the ability to sell and promote Nexen-branded products in ordinary channels of trade, but Nexen requires that all U.S. resellers of Nexen products, whether they be direct dealers, associated dealers, or third-party resellers, adhere to this Minimum Advertised Pricing (MAP) policy. This policy is being implemented unilaterally by Nexen, and Nexen will not invite or accept any input into its terms, how it will be administered, or how it will be maintained. Further, this is not an agreement between Nexen and any other party, and Nexen will not ask for or accept any agreement from another party.
- II. This MAP policy applies to only those Nexen-branded products sold by Nexen listed in the Appendix to this MAP Policy (the "Products"), and only to the "advertising" practices of the resellers.
- III. Any reseller of Nexen products may not advertise any price below that of the officially published MAP for that particular product. Further detail on prohibited advertising is set forth in Section VI below.
- IV. The Company shall not mandate the actual selling price of any Product by a reseller, and shall not issue any directive or limitation regarding maximum advertised prices. Each reseller remains free to set, independently, the actual resale price, and no employee or agent of Nexen shall be authorized to require anything to the contrary.
- V. This MAP policy applies to all advertisements of Nexen products in any and all media, whether in print, online, or in an email. Without limiting the generality of the foregoing, the MAP policy includes:
 - a. flyers, posters, coupons, mailers, inserts, newspapers, publications, magazines, circulars, catalogs, mail order catalogs, public signage, and other print media, including advertisements and marketing by affiliates;

- b. broadcasts on networks, television, and radio, including advertisements and marketing by affiliates;
 - c. Online and any other electronic or social media marketing, including websites that can be accessed directly through any hypertext link or by any other method which uses the hypertext transfer protocol (http); search engine advertising, broadcast email newsletters, email solicitations, automated response pricing emails, SMS or other phone/electronic text messages, search engine optimization, banners, pop-ups or pop-under ads, price comparison sites, auction functions or websites, shopping websites, shopping feed and portal sites, online display advertising, or similar electronic media, including advertisements and marketing by affiliates.
 - d. Email and customer service interactions in response to a customer inquiry are not considered advertising.
 - e. This MAP policy does not apply to in-store shelf talkers and point of purchase displays such as signage, price tags, or prices written in a sample book, as long as such displays are not distributed or displayed to any customers in any digital media cross-promotions (e.g., Facebook, Instagram, or Pinterest).
- VI. If the advertising method provides for or suggests a price below the minimum advertised price, such advertising violates this MAP policy. Examples of advertising methods that violate this MAP policy include, but are not limited to, the following:
- a. The use of a rebate, coupon, promotion, giveaway, or incentive that reduces the advertised price below the minimum advertised price.
 - b. The inclusion in advertising of a fee or discounted products with a Product covered by this MAP policy if it has the effect of discounting the advertised price of the covered Product below the minimum advertised price.
 - c. Offering free shipping and handling of Nexen-branded products violates this MAP policy if the monetary value for such offer results in the display of the price for such Product below the established minimum advertised price for such Product.
 - d. If pricing is displayed, any strike-through or other alteration of the established minimum advertised price is prohibited.

MINIMUM ADVERTISED PRICING POLICY (MAP)

- e. The use of “click on” or “click through” button on a website, or any similar buttons or automated price quotation transmission features, to provide automatic price quotations at or below the established minimum advertised price.
 - f. Language such as “Click ‘Buy for Price’” or “Click ‘Add to Cart’ for Price” or “Click for Quote” if used on the same website page on which Nexen-branded products are being advertised for sale.
 - g. Statements such as “Click here for Lower Price,” “Add to Cart for Lower Price,” or “Check Cart for Lower Price.”
- VII. This MAP policy does not:
- a. Prohibit responses to specific requests for price quotes by an individual customer as long as such responses are not automatic and are given in an individualized personal communication to the requesting customer.
 - b. Apply to the price at which goods are actually sold. Nexen resellers are free to sell the Nexen products at any price.
- VIII. Intentional or repeated failures to comply with this MAP policy for Nexen products can result in sanctions being unilaterally imposed in Nexen’s sole discretion, which may include one or more of the following actions: (1) suspension and/or loss of any future product purchase discounts, rewards earned or to be earned, loyalty bonuses earned or to be earned, brand support bonuses earned or to be earned, and sales incentives; (2) suspension of shipments of products; (3) termination of the reseller’s business relationship with Nexen. Nexen will act in its own unilateral discretion should it observe a failure to comply with this MAP policy. As a standard practice Nexen usually will give — but is not obligated to give — a notice to any reseller violating the policy.
- IX. Nexen reserves the right to modify or suspend this MAP policy or adjust the MAP for any product at any time. Such changes will apply equally to all resellers.
- X. Nexen resellers shall provide a copy of this MAP to all of their third-party resellers, as this MAP applies to such third-party resellers as well.
- XI. All questions regarding this Policy can be directed to the Nexen Tire America Compliance Team at map@nextentireusa.com.

NOTES: _____



Scan for the digital
version of the
Product Showcase.

NEXEN **NEXEN TIRE**

NEXEN TIRE AMERICA INC.

Corporate Headquarters

4014 Wheatley Road, Richfield, OH 44286

T: (800) 576-3936

E: info@nexentireusa.com

NexenTireUSA.com

13967-25 © 2026 Nexen Tire USA